



App. No. 10/786,567

Attorney Docket No. 83388.0017
Customer No. 26021

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Masahiko ANDO, et al.

Serial No: 10/786,567

Confirmation No.: 2527

Filed: February 25, 2004

For: ELECTRODE SUBSTRATE, THIN
FILM TRANSISTOR, DISPLAY
DEVICE AND THEIR PRODUCTION

Art Unit: 2822

Examiner: Mark V. Prenty

**TRANSMITTAL OF CERTIFIED TRANSLATION
OF PRIORITY DOCUMENT**

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450
Dear Sir:

I hereby certify that this correspondence
is being deposited with the United States
Postal Service with sufficient postage as
first class mail in an envelope addressed
to: Mail Stop Amendment
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

March 31, 2006

Date of Deposit

Firoozeh Vakiltzadeh

Name

[Signature]

3/31/06

Signature

Date

Enclosed herewith is a certified English translation of Japanese Patent
Application No. 2003-312079 filed September 4, 2003, from which priority is
claimed under 35 U.S.C. § 119 and Rule 55.

Acknowledgment of the priority document(s) is respectfully requested to
ensure that the subject information appears on the printed patent.

Respectfully submitted,

HOGAN & HARTSON L.L.P.

Date: March 31, 2006

By:

[Signature]

Dariush G. Adli

Registration No. 51,386

Attorney for Applicant(s)

500 South Grand Avenue, Suite 1900
Los Angeles, California 90071
Phone: 213-337-6700
Fax: 213-337-6701

DECLARATION

I, Katsunori ANDO , a national of Japan,
c/o Asamura Patent Office of 331-340, New Ohtemachi
Building, 2-1, Ohtemachi-2-chome, Chiyoda-ku, Tokyo, Japan
do hereby solemnly and sincerely declare:

- 1) THAT I am well acquainted with the Japanese language
and English language, and
- 2) THAT the attached is a full, true, accurate and
faithful translation into the English language made
by me of Japanese Patent Application No. 2003-312079.

The undersigned declares further that all
statements made herein of his own knowledge are true and
that all statements made on information and belief are
believed to be true; and further that these statements
were made with the knowledge that willful false statements
and the like so made are punishable by fine or imprisonment,
or both, under section 1001, of Title 18 of the United
States Code and that such willful false statements may
jeopardize the validity of the application or any patent
issuing thereon.

Signed this 17th day of March , 2006 .


Katsunori ANDO



2003-312079

[Title of Document] Patent Application
[Reference Number] 1103013151
[Addressee] Commissioner
The Patent Office
[International Patent Classification] G09F 9/30
H01L 51/00
[Inventor]
[Address] c/o Advanced Research Laboratory,
HITACHI, LTD., 2520, Akanuma,
Hatoyamacho, Hiki-gun, Saitama, Japan.
[Name] Masahiko ANDO
[Inventor]
[Address] c/o Hitachi Research Laboratory,
HITACHI, LTD., 1-1, Omikacho 7-chome,
Hitachi-shi, Ibaraki, Japan.
[Name] Masaya ADACHI
[Inventor]
[Address] c/o Hitachi Research Laboratory,
HITACHI, LTD., 1-1, Omikacho 7-chome,
Hitachi-shi, Ibaraki, Japan.
[Name] Hiroshi SASAKI
[Inventor]
[Address] c/o Hitachi Research Laboratory,
HITACHI, LTD., 1-1, Omikacho 7-chome,
Hitachi-shi, Ibaraki, Japan.
[Name] Masatoshi WAKAGI
[Applicant]
[Applicant's ID Number] 0 0 0 0 0 5 1 0 8
[Name] HITACHI, LTD.

2003-312079

[Agent]

[Agent's ID Number]	1 0 0 0 7 5 0 9 6
[Patent Attorney]	
[Name]	Yasuo SAKUTA
[Telephone]	03-3212-1111

[Indication on Fee]

[Prepayment Register Number]	013088
[Amount of Payment]	¥21,000-

[List of Items Filed]

[Title of Article]	Claims	1
[Title of Article]	Specification	1
[Title of Article]	Drawings	1
[Title of Article]	Abstract	1

[Scope of Claims for a Patent]

[Claim 1]

An electrode substrate comprising a substrate,
a lower electrode, an insulating film having a liquid-
5 repellent region and a liquid-attracting region on a
surface thereof and an upper electrode, wherein the
lower electrode, the insulating film and the upper
electrode are layered in this order on the substrate;
characterized in that a pattern shape of the lower
10 electrode generally matches with that of the liquid-
repellent region on the surface of the insulating film;
and that the upper electrode is formed mainly on the
liquid-attracting region excluding the liquid-repellent
region on the surface of the insulating film, such that
15 the pattern shape of the upper electrode is a self-
aligned shape in which the pattern shape of the lower
electrode is generally reversed.

[Claim 2]

A thin film transistor comprising the
20 electrode substrate according to Claim 1 characterized
in that, on the electrode substrate, a gate electrode is
formed as the lower electrode, and a source electrode
and a drain electrode are formed as the upper electrodes
on the respective liquid-attracting regions isolated
25 into two or more regions by the liquid-repellent region
formed on the surface of the insulating film in a
pattern shape that generally matches with the lower
electrode, such that the pattern shape of the upper

electrodes is a self-aligned shape in which the pattern shape of the gate electrode, i.e., the lower electrode, is generally reversed; and a semiconductor film characterized in that it is formed to extend over and
5 cover at least a part of each of the source electrode, the drain electrode and the surface of the insulating film (gate electrode region) lying therebetween over/on said electrode substrate.

[Claim 3]

10 An active matrix thin film transistor substrate comprising the electrode substrate according to Claim 1 and thin film transistors having semiconductor films, characterized in that, on the electrode substrate, a plurality of gate
15 wirings/electrodes is formed as the lower electrodes, and a plurality of signal wirings, source/drain electrodes and pixel electrodes are formed as the upper electrodes on the liquid-attracting regions isolated into a plurality of regions by the liquid-repellent
20 regions formed on the surface of the insulating film in a pattern shape that generally matches with the lower electrodes; that the semiconductor films are formed such that they extend over and cover at least a part of each of the source electrodes, drain electrodes and liquid-
25 repellent regions (gate wiring/electrode regions) on the surface of the insulating films lying therebetween over/on the electrode substrate; and that the thin film transistors are each placed at each intersection of the

gate wiring and signal wiring.

[Claim 4]

The active matrix thin film transistor substrate according to Claim 3, characterized in that a
5 plurality of gate wirings/electrodes, characterized by having a shape in which a plurality of adjacently placed ring-shaped rectangles each having an opening are connected to each other at least at one or more locations, are adjacently placed to each other as the
10 lower electrodes; that signal wirings and source/drain electrodes are each formed on the space between said rectangles in a continuous shape spreading over the connection in a self-aligned manner with respect to said gate wirings/electrodes as the upper electrodes; and
15 that the pixel electrodes are each formed in an opening of said ring-shaped rectangle.

[Claim 5]

The active matrix thin film transistor substrate according to Claim 4, characterized in that a
20 width of the connection part for connecting each of a plurality of rectangles each having an opening for composing gate wirings/electrodes and a width of a space between a plurality of gate wirings/electrodes are smaller than a width of a space between a plurality of
25 rectangles each having an opening for composing gate wirings/electrodes.

[Claim 6]

A liquid crystal, electrophoresis, or organic

electroluminescent display device, characterized by comprising the thin film transistor substrate according to any one of Claims 3 to 5 as an active matrix switch.

[Claim 7]

- 5 An RFID device, characterized by comprising the thin film transistor according to Claim 2 as at least a part thereof.

[Claim 8]

- The electrode substrate, thin film transistor
10 and active matrix thin film transistor substrate according to any one of Claims 1 to 3, characterized by comprising a photosensitive liquid-repellent monolayer comprising a carbon chain in which at least a part thereof is terminated with fluorine or hydrogen as a
15 photosensitive liquid-repellent film.

[Claim 9]

- A method for forming the electrode substrate, thin film transistor, and active matrix thin film transistor substrate according to any one of Claims 1 to
20 5, characterized by comprising the steps of:

 layering a lower electrode, an insulating film and a photosensitive liquid-repellent monolayer in this order on a substrate;

- removing the photosensitive liquid-repellent
25 monolayer from the surface of the insulating film at portions not masked by the gate electrode by back-surface exposure to form a liquid-attracting region, wherein the photosensitive liquid-repellent monolayer is

processed so that the pattern shape thereof generally matches with that of the lower electrode; and

coating and calcining a liquid material (conductive ink) containing at least one of a metallic
5 ultrafine particle, a metal complex and a conductive polymer to form an upper electrode mainly on the surface of said liquid-attracting region.

[Claim 10]

A method according to Claim 9 for forming the
10 electrode substrate, thin film transistor, and active matrix thin film transistor substrate according to any one of Claims 1 to 5, characterized by comprising the steps of:

adjacently placing a substrate, on the surface
15 of which a photocatalytic material comprising titanium oxide, nitrogen-doped titanium oxide, strontium titanate or the like that shows photocatalysis with a light having a wavelength that transmits the substrate, insulating film and photosensitive liquid-repellent
20 film, but does not transmit the lower electrode, on the surface of a light-transmitting substrate on which an opaque lower electrode, a light-transmitting insulating film and a photosensitive liquid-repellent film are layered in this order; and

25 decomposing the photosensitive liquid-repellent film by the photocatalysis by the photocatalytic material that has absorbed the light that transmitted the substrate, insulating film and

photosensitive liquid-repellent film by the back-surface exposure to be processed to a pattern having a generally same shape as that of the lower electrode.

[Claim 11]

5 The electrode substrate, thin film transistor, and active matrix thin film transistor substrate according to any one of Claims 1 to 5, characterized in that at least one of the substrate and the insulating film is formed by a material that does not transmit a
10 light with a photosensitive wavelength of the photosensitive liquid-repellent film.

[Kind of Document] Description

[Title of Invention] ELECTRODE SUBSTRATE, THIN
FILM TRANSISTOR, DISPLAY
DEVICE AND THEIR PRODUCTION

5 [Detailed Description of the Invention]

 [0001]

 [INDUSTRIAL FIELD]

 The present invention relates to an electrode
substrate in which a lower electrode and an upper
10 electrode face each other with an insulating film
therebetween and a semiconductor device using the same
such as a thin film transistor and a display device,
particularly to an electrode substrate in which a lower
electrode and an upper electrode whose main shapes are
15 formed as reversed patterns of each other are placed in
a self-aligned manner to each other and a semiconductor
device such as a thin film transistor and a display
device using the above described electrode substrate,
and to a method for producing them.

20 [0002]

 [PRIOR ART]

 An electrode substrate in which a lower
electrode and an upper electrode face each other with an
insulating film therebetween includes, for example, the
25 electrode substrate for use in a thin film transistor
for an active matrix driving liquid crystal display

device. In this electrode substrate, the lower electrode as a gate wiring/electrode, the gate insulating film, and the upper electrode as a source/drain electrode and signal wiring are formed in this order by lamination on a substrate comprised of glass or the like. In order to form a thin film transistor and a display device driven by the same on a substrate having a large area with a high degree of accuracy, the lower electrode and upper electrode for composing wirings/electrodes each need to be processed to form a fine pattern and placed in an accurate alignment with each other. Therefore, so called photolithography method each using separate photomasks is used as a general method to process and form the lower and upper electrodes. In this method, a photomask that is preliminarily processed to form a fine pattern is placed to a (positive type) photoresist deposited on the electrode; the photoresist is subjected to photoirradiation and removed from an exposed region; the electrode is processed by removing the electrode from the uncovered region of the photoresist; and finally the photoresist is removed. The accurate alignment of the photomask to be used for processing each electrode allows each electrode pattern to be accurately aligned.

[0003]

A back-surface exposure method is known as a method for accurately aligning a lower electrode and an upper electrode. The present invention comprises a

method for utilizing "a part" of a lower metal electrode in an auxiliary manner as a photomask for determining "a part" of the pattern shape of an upper electrode. The detail of this method is described, for example, in
5 Japanese Patent No. 3,304,671 by the same inventor.

[0004]

In recent years, a method for using a printing method that is so called direct-drawing method such as inkjet, plating, and offset printing has been actively
10 studied as a method for forming the electrode for use in these electrode substrates, as described, for example, in Nikkei Electronics, No. 6.17, pp. 67-78, 2002. In these printing methods, necessary materials are placed and formed in necessary locations. Therefore, these
15 printing methods have less number of production processes and higher utilization efficiency of materials than a photolithography process, leading to an expectation to an advantage that an electrode substrate can be formed at a low cost. The above literature
20 introduces an example in which a metal wiring having a line width of 5 μm or less has been formed by an inkjet method, as an example in which a fine electrode pattern has been formed by using a printing method.

[0005]

25 A thin film transistor using the electrode substrate described above is utilized in an active matrix driving display device, and used in a flat image-display device such as a laptop display device, cellular

phone, or flat TV screen using, for example, liquid crystal elements, organic electroluminescent elements, electrophoresis elements and the like as display elements. In addition, there is a move in which a thin
5 film transistor using the above electrode substrate is utilized to RFID, a non-contact information medium, typified by a non-contact IC card. In either case, a thin film transistor is utilized in basic products that support an advanced information-oriented society as a
10 man-machine interface device through the medium of image and communication information.

[0006]

[PROBLEMS TO BE SOLVED BY THE INVENTION]

In the above prior arts, if a photolithography
15 method can be replaced by a printing method as a method for forming an electrode substrate in which a lower electrode and an upper electrode, which have fine pattern shapes and are accurately aligned to each other, face each other with an insulating film therebetween,
20 production processes would be much reduced and utilization efficiency of materials would be improved, leading to an expectation of an advantage that a large number of electrode substrates can be formed at a low cost.

25 [0007]

However, it has been difficult to use a printing method, particularly as a method for forming electrodes in the electrode substrate with the above

construction due to the following reasons.

Specifically, "misregistration" occurs when an electrode with a fine shape, which is formed using a printing method, is transferred onto a substrate from a printing

5 device. This causes the problem that even when at least one of a lower electrode and an upper electrode formed thereon through an insulating layer can be formed in a fine pattern shape using a printing method, the both cannot be aligned accurately. This will be described

10 with reference to Fig. 12 which shows the problem of misregistration of electrodes in the electrode substrate according to the present invention. Fig. 12 (a) shows a plan view illustrating electrodes that are well aligned and a sectional view taken along line A-A'; and Figs. 12

15 (b) to (d) are plan views illustrating electrodes with "misregistration". A lower electrode 2, an insulating film 3, and upper electrodes 5 and 6 are layered in this order on a substrate 1. In Fig. 12 (a), both sides of the lower electrode 2 match with right end and left end

20 of the upper electrodes 5 and 6 respectively, that is, they are well aligned. On the other hand, Fig. 12 (b) shows an example in which the lower electrode 2 has shifted to the lower right on the substrate surface; Fig. 12 (c) shows an example in which the upper

25 electrodes 5 and 6 have shifted to the upper left on the surface of the insulating film; and Fig. 12 (d) shows an example in which both misregistrations have occurred. The occurrence of misregistration causes loss of the

matching of position between the lower electrode 2 and upper electrodes 5 and 6, and causes unnecessary overlapping and separation therebetween, even when electrodes are formed in fine patterns. It is known
5 that, in the case of an inkjet method, such "misregistration" occurs while a conductive ink ejected from a head part is flying until it attaches a substrate, and in the case of a transfer printing method, it occurs when a pattern of a conductive ink is
10 transferred from a transfer roll to a substrate.

[0008]

This results in a problem that when an electrode substrate of the above construction without the defect of electrode misregistration, it is necessary
15 to use a photolithography method in at least a part of the processes, which prevents the reduction of production processes and improvement of utilization efficiency of materials. Further, there is a problem that when a thin film transistor and a semiconductor
20 device such as a display device using the same are produced using the electrode substrate in which misregistration has occurred as a result of production by a printing method, the performance and uniformity of devices are low and devices cannot be highly integrated
25 with higher definition.

[0009]

To these problems, it is an object of the present invention to provide an electrode substrate and

a method for producing the same in which a lower electrode and an upper electrode, which have fine pattern shapes and are accurately aligned to each other, face each other in self-alignment with an insulating film therebetween, by using a printing method in place of a photolithography method, and to provide a semiconductor device such as a thin film transistor and a display device using the above described electrode substrate and a method for producing the same.

10 [0010]

[MEANS FOR SOLVING THE PROBLEM]

As means for solving the above problems, a method described below is used as a method for producing an electrode substrate comprising a substrate, an opaque lower electrode, a light-transmitting insulating film having a liquid-repellent/a liquid-attracting region on the surface thereof and an upper electrode, wherein the lower electrode, the insulating film and the upper electrode are layered in this order on the substrate, characterized in that a pattern shape of the lower electrode generally matches with that of the liquid-repellent region on the surface of the insulating film, and that the upper electrode is mainly formed on the liquid-attracting region outside the liquid-repellent region on the surface of the insulating film, such that the pattern shape of the upper electrode is a self-aligned shape in which the pattern shape of the lower electrode is generally reversed. First, as a member for

providing the liquid-repellent region on the surface of the insulating film, a photosensitive liquid-repellent film is subjected to pattern processing using a so-called back-surface exposure method in which the

5 photosensitive liquid-repellent film, in which light-irradiation changes its property from a liquid-repellent property that repels liquid dropped on the surface to a liquid-attracting property that the liquid wets the surface and spreads, is used to be subjected to the

10 light-irradiation from the back-surface of the substrate using the lower electrode as a photomask. Namely, the photosensitive liquid-repellent film is removed to form the liquid-attracting region on the surface of the insulating film that is not shielded by the lower

15 electrode, and the photosensitive liquid-repellent film having a generally same shape as that of the lower electrode remains to form the liquid-repellent region on the surface of the insulating film that is shielded by the lower electrode. The upper electrode, characterized

20 by having a pattern shape that is a generally reversed shape of the pattern shape of the lower electrode, is formed in a self-aligned manner by dropping a conductive ink, in which at least one of metallic ultrafine particles, metal complexes, and conductive polymers is

25 dispersed in a solvent, mainly on the liquid-attracting region of the surface of this insulating film and subjecting it to coating and calcining.

[0011]

Further, there is formed a thin film transistor comprising an electrode substrate characterized in that, on the electrode substrate, a gate electrode is formed as the lower electrode, and a source electrode and a drain electrode are formed as the upper electrodes on the liquid-attracting regions separated to two or more by the liquid-repellent region formed on the surface of the insulating film in a pattern shape that generally matches with the lower electrode, such that the pattern of the upper electrodes has a generally reversed shape of the lower electrode, the gate electrode, and placed in a self-aligned manner to the gate electrode; and a semiconductor film characterized in that it is formed to extend over and cover at least a part of each of the source electrode, drain electrode and the liquid-repellent region on the surface of the insulating film (gate electrode region) lying therebetween on the above electrode substrate.

[0012]

Further, there is formed an active matrix thin film transistor substrate comprising an electrode substrate and thin film transistors having semiconductor films, characterized in that, on the electrode substrate, a plurality of gate wirings/electrodes is formed as the lower electrodes, and a plurality of signal wirings, source/drain electrodes and pixel electrodes are formed as the upper electrodes on the liquid-attracting regions separated to plural numbers by

the liquid-repellent regions formed on the surface of the insulating film in a pattern shape that generally matches with the lower electrodes; that the semiconductor films are formed such that they extend
5 over and cover at least a part of each of the source electrodes, drain electrodes and liquid-repellent regions (gate wiring/electrode regions) on the surface of the insulating films lying therebetween on the electrode substrate; and that the thin film transistors
10 are each placed at each intersection of the gate wiring and signal wiring.

[0013]

Further, there is formed the active matrix thin film transistor substrate, characterized in that a
15 plurality of gate wirings/electrodes, characterized by having a shape in which a plurality of adjacently placed ring-shaped rectangles each having an opening is connected to each other at least at one or more locations, are adjacently formed to each other as the
20 lower electrodes; that signal wirings and source/drain electrodes are each formed on the space between the rectangles in a continuous shape spreading over the connection in a self-aligned manner to the gate wirings/electrodes as the upper electrodes; and that the
25 pixel electrodes are each formed in an opening of the ring-shaped rectangle. In particular, in the shape and configuration of the plurality of gate wirings/electrodes, there is formed the active matrix

thin film transistor substrate, characterized in that the width of the connection part for connecting each of a plurality of ring-shaped rectangles each having an opening in gate wirings/electrodes and the width of the space between a plurality of gate wirings/electrodes are smaller than the width of the space between a plurality of ring-shaped rectangles each having an opening for composing gate wirings/electrodes.

[0014]

10 A photosensitive liquid-repellent monolayer comprising a carbon chain in which at least a part thereof is terminated with fluorine or hydrogen is used as a photosensitive liquid-repellent film in place of a photoresist.

15 [0015]

Further, as a method for producing the electrode substrate having the above characteristics, on the surface of a light-transmitting substrate on which an opaque lower substrate, a light-transmitting insulating film and a photosensitive liquid-repellent film are layered in this order, a photocatalytic material, which is comprised of titanium oxide, nitrogen-doped titanium oxide, strontium titanate or the like which shows photocatalysis with the light having the wavelengths that transmit the substrate, insulating film and photosensitive liquid-repellent film and does not transmit the lower electrode, is adjacently placed or adhered and is subjected to back-surface exposure;

and wherein the photosensitive liquid-repellent film is decomposed by the photocatalysis shown by the photocatalytic material that has absorbed the light that transmitted the substrate, insulating film and

5 photosensitive liquid-repellent film to be processed to a pattern having a generally same shape as that of the lower electrode. When this method is used, an opaque material to the photosensitive wavelengths of the photosensitive liquid-repellent film may be used for at

10 least one of the substrate or insulating film. As a method other than this, a so-called lift-off method, in which the photoresist formed on the insulating film is subjected to back-surface exposure to process and form to the same pattern shape as that of the lower

15 electrode; the photosensitive liquid-repellent film is layered thereon; and then the photoresist is removed, can be used to subject the photosensitive liquid-repellent film to pattern processing to provide a generally same shape as that of the lower electrode.

20 [0016]

The electrode substrate, thin film transistor, and active matrix thin film transistor substrate formed by the above configuration and production method are used to form a liquid crystal, electrophoresis, or

25 organic electroluminescent display device. Further, semiconductor devices such as an RFID tag device are formed using the above electrode substrate and thin film transistor to at least a part thereof.

[0017]

According to the production method of the present invention, a photosensitive liquid-repellent monolayer is used as a photosensitive liquid-repellent film as described above in place of conventionally commonly used photoresists. The above photosensitive liquid-repellent monolayer is exposed using the lower electrode as a photomask to form a liquid-attracting/liquid-repellent pattern on the surface of the substrate. A conductive ink is coated and calcined on the liquid-attracting region of the substrate surface to form the pattern of the upper electrode. Since the pattern forming principle discovered by the inventor is utilized at this time, the shape of the lower electrode which is a photomask for defining the general shape of the upper electrode has the characteristics as described above.

[0018]

Now, the principle of forming patterns used in the present invention will be described below. First, the difference as a photosensitive liquid-repellent film between the photosensitive liquid-repellent monolayer used in the present invention and conventional photoresists will be described. Since photoresists generally have a lower liquid-repellent property than the photosensitive liquid-repellent monolayer, but can form a thick film of about 1 μm , there is provided a step height between a liquid-repellent region

(photoresist part) and a liquid-attracting region to hold a conductive ink utilizing the step height to form an electrode pattern. On the other hand, since the photosensitive liquid-repellent monolayer generally has
5 a higher liquid-repellent property than photoresists, but forms a thin film of about 2 nm or less, it cannot utilize the step height effect like photoresists and typically confines the conductive ink within a liquid-attracting region by the liquid-repellent action to form
10 an electrode pattern.

[0019]

Fig. 11 shows the relation between liquid-attracting/liquid-repellent patterns formed by a photosensitive liquid-repellent monolayer and an
15 electrode pattern formed by coating. The principle of forming patterns utilized in the present invention will be described using this figure. Fig. 11 (1) to (3) shows the state where an electrode pattern of the same shape is formed relative to three different liquid-
20 repellent patterns, as plan views and sectional views taken along line A-A' and B-B' for respective substrates. On a substrate 1 in each figure, a part in which a liquid-repellent film comprised of a photosensitive monolayer is formed is a liquid-repellent
25 region, and a part in which the liquid-repellent film is not formed is a liquid-attracting region. Here, a region which has a so-called contact angle, that is made between a substrate surface and a water drop when pure

water is dropped, of about 90° or more is defined as a liquid-repellent region, and a region having a contact angle of 45° or less as a liquid-attracting region. In Fig. 11 (1), the liquid-repellent region has a ring-form
5 having a closed outer periphery surrounding a rectangular liquid-attracting region inside. When a conductive ink is coated on this liquid-attracting region, the conductive ink does not wet and spread over the liquid-repellent region but is confined within the
10 liquid-attracting region. An electrode 5 having the same shape as the above described liquid-attracting region is obtained by calcining it. This is a general principle of forming patterns that can be obtained in the same manner when photoresists are used as a liquid-
15 repellent film.

[0020]

In Fig. 11 (2), a part (right center part in this figure) of a ring-form liquid-repellent region in Fig. 11 (1) is separated by an elongated liquid-
20 attracting region. In this case, when a conductive ink is coated on the rectangular liquid-attracting region, almost all of the outer periphery thereof being surrounded by the liquid-repellent region, the conductive ink neither wet and spread over the liquid-
25 repellent region in the same manner as in Fig. 11 (1), nor penetrate into the separated part of the liquid-repellent region, which is calcined to obtain an electrode having generally the same shape as in Fig. 11

(1). It has been found that a necessary condition where the conductive ink does not leak from the separated part of the liquid-repellent region requires that the space of the part separated by the liquid-attracting region is smaller than the shortest space of the liquid-attracting region (short side for the rectangle shown in this figure). This is understood to occur due to a general property of liquid that the conductive ink that is dropped tends to minimize the surface area (surface energy) as much as possible. Such an effect in which the conductive ink, a liquid material held within a relatively wider liquid-attracting region, does not penetrate into a relatively narrower liquid-attracting region which is connected to the former region is hereinafter referred to as "non-penetrating effect of conductive ink".

[0021]

In Fig. 11 (3) on the other hand, the ring-form liquid-repellent region in Fig. 11 (1) is connected by an elongated liquid-repellent region at the central part thereof, resulting in separation of a rectangular liquid-attracting region surrounded by the liquid-repellent region to upper and lower parts. Also in this case, when a sufficient amount of conductive ink is coated on the rectangular liquid-attracting region, the outer periphery thereof being surrounded by the liquid-repellent region, the conductive ink does not wet and spread over the liquid-repellent region in the same

manner as in Fig. 11 (1), but wets and spreads over the above described elongated connecting part of the liquid-repellent region, combining the conductive ink coated on the two upper and lower liquid-attracting regions into
5 one, which is calcined to obtain an electrode having generally the same shape as in Fig. 11 (1). It has been found that a necessary condition, where the conductive ink coated on two liquid-attracting regions is combined into one by flowing over the liquid-repellent region
10 separating the two regions, requires that the width of the elongated liquid-attracting region separating the liquid-attracting region is smaller than the shortest space of the liquid-attracting region for dropping the conductive ink (short side for the rectangle shown in
15 this figure). This is understood to occur due to a general property of liquid that the conductive ink that is dropped tends to minimize the surface area (surface energy) as much as possible by taking one combined shape rather than taking two separated shapes. Such an effect
20 in which the conductive ink, a liquid material held within relatively wider liquid-attracting regions separated into two by a relatively narrower liquid-repellent region, flows over the above described narrow liquid-repellent region to be combined into one is
25 hereinafter referred to as "crosslinking effect of conductive ink". This crosslinking effect cannot be obtained when using photoresists having the step height as a member for forming the liquid-repellent region, but

can only be obtained when using the photosensitive liquid-repellent monolayer having almost no step height as in the present invention.

[0022]

5 In the present invention, in order to form an upper electrode using a conductive ink, utilizing the above described "non-penetrating effect of conductive ink" and "crosslinking effect of conductive ink", the above described devices are used for the shape of a
10 photosensitive liquid-repellent film and the shape of a lower electrode used as the photomask determining the shape of the photosensitive liquid-repellent film. The detail will be specifically described in examples below.

[0023]

15 According to the present invention, the pattern of the upper electrode has a shape in which the lower electrode is generally reversed by the above effects, and so is aligned to the lower electrode in a self-alignment manner. Therefore, when a printing
20 method such as inkjet capable of forming fine patterns is used as a method for forming a lower electrode, the upper pattern formed by the printing method is also a fine pattern, and is also aligned to the lower electrode in a self-alignment manner. Thus, it is possible to
25 form an electrode substrate in which a lower electrode and an upper electrode, which have fine pattern shapes and are accurately aligned to each other in a self-alignment manner, face each other with an insulating

film therebetween, without using a photolithography method, and to provide a semiconductor device such as a thin film transistor and a display device using the same.

5 [0024]

[ADVANTAGEOUS EFFECT OF THE INVENTION]

According to the present invention, since an upper electrode having a reversed pattern shape of a lower electrode is formed using liquid-attracting/liquid-repellent regions formed by the photosensitive liquid-repellent film to which the pattern shape of the lower electrode is transferred utilizing the lower electrode itself as a photomask, the lower electrode and the upper electrode are aligned in a self-alignment manner, and the misregistration will not occur even when the lower electrode is formed by a printing method. Consequently, an electrode substrate in which a lower electrode and an upper electrode are accurately aligned through an insulating film can be formed by a printing method. Wirings/electrodes placed in self-alignment crossing each other through an insulating film can be printed by devising the pattern shape of a lower electrode so that the non-penetration effect and the crosslinking effect of conductive ink can be utilized when coating and forming an upper electrode using the conductive ink. The effect of reducing the number of processes for producing an electrode substrate by a printing method is shown in Fig. 16. A

10
15
20
25

conventional photolithography method requires eight processes for forming one electrode, that is, 19 processes in total. On the other hand, the use of the printing method of the present invention allows the
5 production by seven processes, less than the half of the conventional method, the effect of improving productivity being obvious.

[0025]

[EMBODIMENT]

10 Hereinafter, several examples of the present invention will be specifically described with reference to drawings. First, a light patterning method by back-surface exposure of a photosensitive liquid-repellent film, which is a common technology, will be described
15 with reference to Fig. 13.

[0026]

First, there is provided an electrode substrate in which a lower electrode 2, a light-transmitting insulating film 3 and a photosensitive
20 liquid-repellent film 4 are layered in this order on a light-transmitting substrate 1. For example, a quartz substrate having a thickness of 1 mm is used as the substrate 1; a Cr thin film having a thickness of 140 nm is used as the lower electrode 2; a silicon oxide film
25 having a thickness of 400 nm is used as the insulating film 3; and a fluorinated alkyl-based silane coupling agent typified by $\text{CF}_3(\text{CF}_2)_7(\text{CH}_2)_2\text{SiCl}_3$ and the like, which is a liquid-repellent monomer having a carbon chain

terminated with a fluorine group in at least a part thereof is used as the photosensitive liquid-repellent film 4, and these are formed in the following methods respectively. The lower electrode 2 was formed by
5 depositing a Cr thin film having a thickness of 400 nm at a substrate temperature of 200°C using a DC magnetron sputtering device and then processing it by using a ceric ammonium nitrate solution as an etching solution in a photolithography method (Fig. 13 (a)). The
10 insulating film 3 was deposited at a substrate temperature of 350°C using a plasma chemical vapor deposition method (plasma CVD method), using tetraethoxysilane (TEOS) and oxygen (O₂) as source gases. The photosensitive liquid-repellent film 4 was formed by
15 thoroughly cleaning the surface of the substrate 1 on which the lower electrode 2 and the insulating film 3 are layered in this order, then coating a solution prepared by dispersing the above silane coupling agent in a fluorine-based solvent by spin coating, dip
20 coating, spraying or the like and drying it (Fig. 13 (b)). The above substrate was subjected to so-called back-surface exposure by irradiating the back surface with the light emitted by a low pressure mercury lamp for about 30 minutes (Fig. 13 (c)). The light path of
25 radiation is indicated by arrows in the figure. After the completion of the back-surface exposure, the photosensitive liquid-repellent film 4 is removed from the light-irradiated region (non-shielding region by the

lower electrode) on the surface of the insulating film 3 to form a liquid-attracting region, and the photosensitive liquid-repellent film remains on the non-irradiated region (shielding region by the lower
5 electrode) on the surface of the insulating film 3 to form a liquid-repellent region. This was confirmed by the following methods. The presence or absence of the photosensitive liquid-repellent film was determined by determining the presence or absence of a fluorine
10 element using photoelectron spectroscopy such as XPS and UPS, and TOF-SIMS (Time-of-Flight Secondary Ion Mass Spectrometry). In addition, a contact angle was measured by dropping pure water on the surface of the insulating film 3. The non-irradiated region showed a
15 contact angle of 100° to 120°, while the light-irradiated region showed 30° or less. In addition, when the substrate was immersed in pure water and pulled up, the pure water adhered only to the light-irradiated region (non-shielding region by the lower electrode) on the
20 surface of the insulating film 3, and the overlapping width at the edges of the pure water and the lower electrode 2 as observed in the vertical direction to the substrate was 1 μm or less.

[0027]

25 From the above results, it was ascertained that the photosensitive liquid-repellent film 4 is processed to a generally same pattern shape as that of the lower electrode 2 by the back-surface exposure

method utilizing the lower electrode 2 as a photomask
(Fig. 13 (d)).

[0028]

In the following examples, the shape of the
5 lower electrode 2 that is used as a photomask is devised
depending on purposes so that the photosensitive liquid-
repellent film is processed to a generally same pattern
shape as that of the lower electrode 2. At this time,
the shape of the lower electrode 2 and that of the
10 photosensitive liquid-repellent film 4 are overlapped in
a plan view of an electrode substrate, and so they
cannot be distinguishably expressed. In the following
figures, the description of 2 and 4 in a figure means
that the photosensitive liquid-repellent film 4 is
15 disposed on the lower electrode 2 in a generally same
shape. The substrate 1 and the insulating film 3 are
also described by 1 and 3 in a plan view as the same
meaning.

[0029]

20 [Example 1]

Fig. 1 shows a plan view and a sectional view
illustrating one example of an electrode substrate and a
thin film transistor of the present invention and their
production. The lower electrode 2 and the insulating
25 film 3 are layered in this order on the substrate 1, for
example, using the same members and forming method as
those in Fig. 13. However, in the present example, the
pattern shape of a gate electrode which is the lower

electrode 2 has two openings placed adjacent to each other. In addition, in the present invention, as the photosensitive liquid-repellent film 4 is coated by a dip coating method, the photosensitive liquid-repellent film 4 adheres to the back surface of the substrate 1 other than the insulating film 3 (Fig. 1 (a)). By back-surface exposure, the photosensitive liquid-repellent film 4 is removed from the back surface of the substrate 1, and forms a liquid-repellent region having a generally same pattern shape as that of the lower electrode 2 on the surface of the insulating film 4 (Fig. 1 (b) to (c)). A conductive ink, which is composed of a liquid material containing at least one of metallic ultrafine particles, metal complexes and conductive polymers, is coated on two liquid-attracting regions surrounded by the liquid-repellent region formed on the insulating film 3 and calcined to form upper electrodes 5 and 6 (Fig. 1 (d)). The conductive ink that may be used includes a liquid material having properties that it is repelled from the liquid-repellent region formed by the photosensitive liquid-repelled film 4 and it wets and spreads over the liquid-attracting region from which the photosensitive liquid-repellent film 4 is removed, and showing a sufficiently low resistance value after the calcining. A specific material that can be used includes a solution in which metallic ultrafine particles or metal complexes mainly composed of Au, Ag, Pd, Pt, Cu, Ni or the like and

having a diameter of about 10 nm or less are dispersed in a solvent such as water, toluene or xylene. Further, for forming ITO (indium tin oxide) of a transparent electrode material, a solution in which metal alkoxides
5 such as $\text{In}(\text{O}-i\text{-C}_3\text{H}_7)_3$ and $\text{Sn}(\text{O}-i\text{-C}_3\text{H}_7)_3$ are dispersed in a water, alcohol solvent. Furthermore, an aqueous solution of PEDOT (poly-3,4-ethylenedioxythiophene), polyaniline (PAn), polypyrrole (PPy) or the like doped with PSS (polystyrene sulfonic acid), a conductive
10 polymer such as, can also be used as the transparent electrode material other than this. It was possible to form the upper electrodes 5 and 6 having a film thickness of about 100 nm using any of the above materials by dropping them in an amount enough to cover
15 the above two liquid-attracting regions and then calcining them at an appropriate temperature of about 80 to 500°C in vacuum or in air. In the present example, the upper electrodes 5 and 6 were formed as two rectangular shapes on the liquid-attracting regions
20 other than the liquid-repellent region on the surface of the insulating film, and the pattern shape was a self-aligned shape in which the pattern shape of the lower electrode 2 was generally reversed.

[0030]

25 Cr was used as the lower electrode material in the above example, but any suitable opaque material to the exposure wavelengths may be used. For example, Al, Mo, Au, Ag, Pd, Cu, and the like may be used. Further,

quartz, silicon oxide and a fluorinated alkyl-based silane coupling agent were used for the substrate 1, the insulating film 2 and the photosensitive liquid-repellent film 4, respectively, but any suitable material other than these may be used. However, the materials for the substrate 1 and the insulating film 2 are limited depending on the material for the photosensitive liquid-repellent film 4, because they need to transmit the exposure wavelengths of the photosensitive liquid-repellent film 4. A fluorinated alkyl-based silane coupling agent was used as the material for the photosensitive liquid-repellent film, but other materials may be used, provided they are liquid-repellent monomers having a carbon chain terminated with a fluorine group in at least a part thereof. For example, perfluorooxetane derivatives, such as perfluorooxetane having a fluorine substituent in a side chain as described in JP-A-2001-278874, may be used. However, as these materials for the photosensitive liquid-repellent film have an exposure wavelength of 300 nm or less, the materials for the substrate 1 and the insulating film 2 require those materials that transmit the wavelengths of 300 nm or less (having a band gap of 4 electron volts (eV) or higher), and quartz and silicon oxide were used, respectively, in the above example. The silicon film may be a film prepared by coating and calcining in a sol-gel method, other than forming it by plasma chemical


vapor deposition. Further, silicon nitride (Si_3N_4), silicon oxynitride (SiON), aluminum oxide (Al_2O_3) or zirconium oxide (ZrO_2) may be used other than silicon oxide. Further, the material for the substrate 1 may be
 5 synthetic quartz.

[0031]

A method for shifting the photosensitive wavelengths of the photosensitive liquid-repellent film to a long wavelength of 300 nm or higher includes the
 10 following two ways. One is a photosensitive liquid-repelling film comprised of a molecule having a dye skeleton that thermally decomposes by absorbing the light having a wavelength of 300 nm to 700 nm, which specifically includes compounds 1 and 2 below.


15 [0032]

[Formula 1]

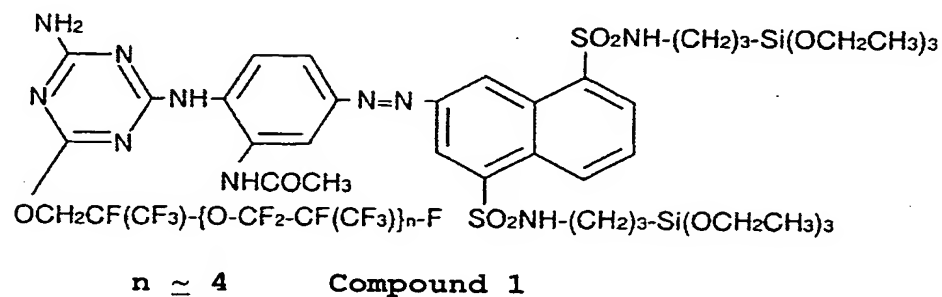

[0033]

[Formula 2]

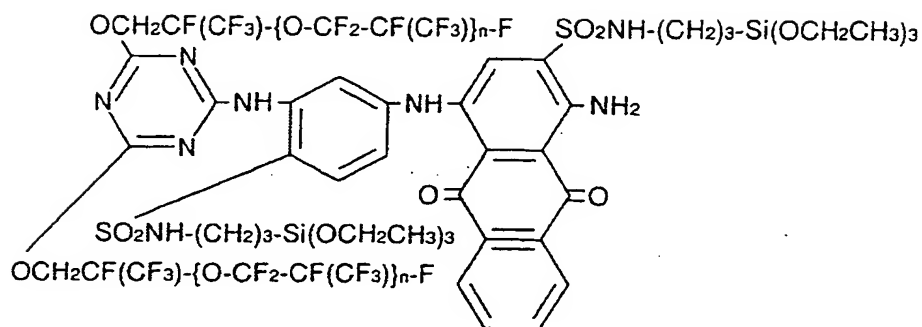

$n \approx 4$

Compound 2

[0034]

Methods for synthesizing these compounds are shown below.

5 [0035]

(Synthesis of compound 1)

The compound 1 is synthesized by reactions (i) to (iii) below.

[0036]


10 (i) Reduction of liquid-repellent material

Krytox 157FS-L made by Du Pont (average molecular weight 2,500) (50 parts by weight) is dissolved in PF-5080 made by 3M (100 parts by weight). The solution is added with lithium aluminum hydride (2 parts by weight) and heated and stirred for 48 hours at 80°C. The reaction solution is poured into ice water, and the lower layer is dispensed, washed with 1% hydrochloric acid and then washed with water until the washed solution becomes neutral. After removing water
15
20 in the solution after washing by filtering with a filter

paper, PF-5080 is evaporated by an evaporator to obtain a compound 3 (45 parts by weight) in which the terminal of Krytox 157FS-L is transformed to CH₂OH.

[0037]

5 [Formula 3]



$n \approx 4$

Compound 3

[0038]


(ii) Introduction of dye skeleton

The compound 3 (45 parts by weight) is dissolved in HFE-7200 made by 3M (100 parts by weight).

10 The solution is added with Reactive Yellow 3 (another name: Procyon Yellow HA) (12 parts by weight), ethanol (100 parts by weight) and sodium carbonate (2 parts by weight) and refluxed for 30 hours. The structure of Reactive Yellow 3 is shown below.

15 [0039]

[Formula 4]

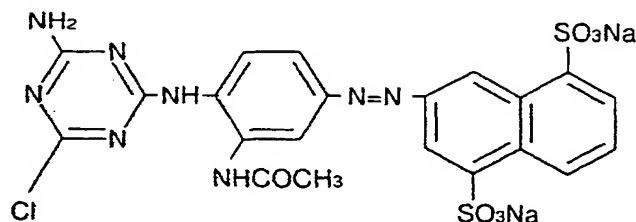

C.I. Reactive Yellow 3


[0040]

The solvents in the reaction solution (HFE-7200 and ethanol) are evaporated by an evaporator. The
20 residue is added with a mixture of HFE-7200 (100 parts

by weight), hydrochloric acid of 35% by weight (100 parts by weight) and ice water (100 parts by weight), vigorously stirred and then left at rest. The lower layer is dispensed and washed with water until the washed solution becomes neutral. After removing water in the solution after washing by filtering with a filter paper, HFE-7200 is evaporated by an evaporator to obtain a compound 4 (45 parts by weight) in which Reactive Yellow 3 is combined with the compound 28.

10 [0041]

[Formula 5]

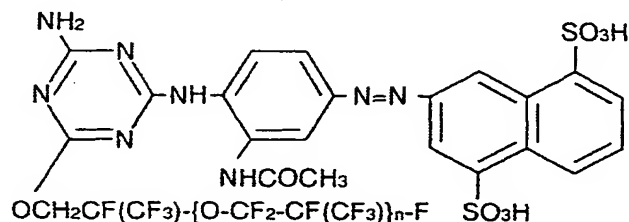

$n \approx 4$

Compound 4

[0042]

(iii) Reaction for introducing binding site

The compound 4 (45 parts by weight) is dissolved in HFE-7200 (100 parts by weight). When the resultant solution is cooled to around 0°C, it is added with Sila-Ace S330 made by Chisso Corporation (10 parts by weight), N,N-dicyclohexylcarbodiimide (10 parts by weight), dichloromethane (20 parts by weight) and stirred for 3 hours. The reaction solution is returned to room temperature and further stirred for 30 hours.

The reaction solution is left at rest and the lower layer is dispensed when the reaction solution is separated into two layers. Note that a hazy layer, which will be produced between the upper and lower 5 layers, must not be added to the lower layer. The lower layer is washed with dichloromethane (20 parts by weight) several times and then filtered with a filter paper. Then, the solvent (HFE-7200) in the solution was evaporated by an evaporator to obtain the target 10 compound 1 (40 parts by weight).

[0043]

(Synthesis of compound 2)


The compound 2 (40 parts by weight) was obtained in the same manner as the synthesis of the 15 compound 1, except that Mikacion Brilliant Blue RS (7 parts by weight) was used in place of Reactive Yellow 3 (12 parts by weight).

[0044]

The chemical structure of Mikacion Brilliant 20 Blue RS is shown below.

[0045]

[Formula 6]

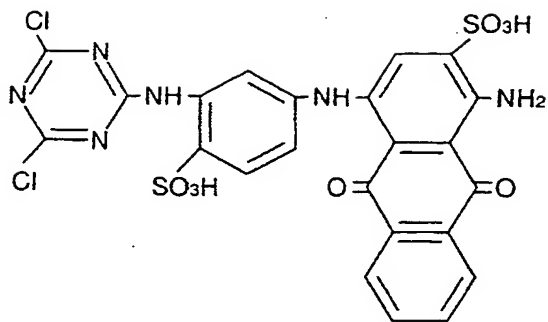

Mikacion Brilliant Blue RS

[0046]

In some cases, a sodium sulfonate part is in the form of sulfonic acid. In these cases, it is transformed to sodium sulfonate with sodium hydroxide or
5 the like before use.

[0047]

When the above compounds 1 and 2 are used as the photosensitive liquid-repellent film, the substrate 1 and the insulating film 3 may only transmit any
10 wavelengths within the above wide wavelength range. Therefore, a thin film having a thickness of 300 nm comprised of tantalum oxide (Ta_2O_5), zirconium oxide (ZrO_2) or lanthanum oxide (La_2O_3), as another inorganic material than silicon oxide (SiO_2), which is formed by
15 plasma chemical vapor deposition or a sol-gel method, may be used for the insulating film 3. Further, a spin-coated film of polyvinylphenol (PVP) or polymethylmethacrylate (PMMA) may be used as an organic material. A typical glass substrate such as Corning
20 1737 or various plastic substrates may be used for the substrate 1.

[0048]

Another method for shifting the photosensitive wavelengths of the photosensitive liquid-repelling film 4 to longer wavelengths uses a photocatalytic material in at least a part of the insulating film 3. The photocatalytic material has the effect of absorbing light to produce holes and electrons having strong oxidizing and reducing power in the film, decomposing organic materials adjacent to the photocatalytic material.

[0049]

In this case, the above described all materials can be used for the photosensitive liquid-repellent film 4. For example, a photocatalytic material comprised of, for example, titanium oxide (TiO_2) is coated by a sol-gel method to form a film having a thickness of about 10 nm between the insulating film 3 and the photosensitive liquid-repellent film 4 as described by Tadanaga and Minami in Material Integration, 14 (10), pp. 9-13 (2001). Since titanium oxide absorbs the light having a wavelength of 400 nm or less to cause photocatalysis, materials transmitting the light having a wavelength of 400 nm or less can be used for the substrate 1 and the insulating film 3. In this case, glass substrates and plastic substrates comprised of polyimides with high light transmittance may be used for the substrate 1. Furthermore, the above described inorganic materials can be used for the insulating film

3. However, organic materials had better not be used because they are decomposed by the photocatalytic material.

[0050]

5 This is the same for a semiconductor material
7 to be described hereinafter, and so organic materials
had better not be used for the same. Further, when
using a so-called visible-light-responsive
photocatalytic material which absorbs visible light of
10 600 nm or less to cause photocatalysis, materials that
transmit the light having a wavelength of 600 nm or less
can be used for the substrate 1 and the insulating film
3. Therefore, all the above described inorganic
materials can be used.

15 [0051]

A method for processing the photosensitive
liquid-repellent film 4 using a photocatalytic material
other than the above, in which organic materials can be
used for the insulating film 1 and the semiconductor
20 material 7, will be described in (Example 6).

[0052]

A thin film transistor can be composed by
forming the semiconductor film 7 on the electrode
substrate of the present invention formed as described
25 above, such that the semiconductor film 7 extends over
and covers at least a part of each of the source
electrode 5, drain electrode 6 and the insulating film
surface having the gate electrode 2 in the lower part

thereof. Following materials and production methods can be used for the semiconductor film 7. As for inorganic materials, an amorphous silicon film having a thickness of about 200 nm is formed by plasma chemical vapor
5 deposition at a substrate temperature of 250°C using silane and hydrogen ($\text{SiH}_4 + \text{H}_2$). Then, the amorphous silicon film is processed to an island shape by dry etching using SF_6 as an etching gas to obtain the semiconductor film 7. Further, it may also be subjected
10 to laser annealing to provide a polycrystalline silicon film. When inorganic materials are thus used for the semiconductor film 7, it is desirable to use inorganic materials such as silicon oxide and silicon nitride also for the insulating film 3. Further, the removal of the
15 photosensitive liquid-repellent film from the surface of the insulating film 3 before forming the semiconductor film 7 is preferable for stabilizing the interface between the insulating film 3 and the semiconductor film 7, thus capable of obtaining good transistor
20 characteristics. For example, the use of amorphous silicon provided equal performance to typical thin film transistors, in which field-effect mobility is 0.5 cm^2/Vs ; threshold voltage is 2 V; and on/off current ratio is seven digits. As for organic materials, in the
25 case of low-molecular weight substances, acene-based materials typified by pentacene and thiophene oligomers are used for film formation by vacuum deposition at a substrate temperature from room temperature to 100°C.

Mask deposition or photolithography using oxygen as the etching gas is used to form the semiconductor film 7 processed in island shape. In the case of pentacene, it can be modified to a soluble precursor/derivative material in a solvent such as toluene or chloroform for film forming by a coating method such as casting, spin coating or dip coating. Furthermore, in the case of polymers, polythiophenes such as poly-3-hexylthiophene (P3HT) having a regio-regular structure (having the orientation in which the whole chain aligns in the same direction with head and tail adjacent to each other) that is a highly regular nano-structure, polyfluorenes such as a copolymer of fluorene-bithiophene (F8T2), and polyphenylenevinylene (PPV) are used for film forming by the coating methods described above. In the case of using organic materials for the semiconductor film 7, the transistor characteristics are improved when the semiconductor film 7 is formed on the photosensitive liquid-repellent film 4 on the gate electrode 2 without removing the photosensitive liquid-repellent film 4. For example, the deposited film of pentacene formed on the photosensitive liquid-repellent film 4 showed the performance of a field effect mobility of $1.0 \text{ cm}^2/\text{Vs}$, a threshold voltage of -2 V , and an on/off current ratio of seven digits. However, when the pentacene film was formed on the insulating film from which the photosensitive liquid-repellent film 4 had been removed, the performance degraded to a field effect mobility of

0.2 cm²/Vs, a threshold voltage of -5 V, and an on/off current ratio of four digits. It is contemplated that the photosensitive liquid-repellent film 4 has the effect in improving the orientation order of organic semiconductor materials.

[0053]

[Example 2]

In this example, the case in which the lower electrode 2 is formed by a printing method such as ink jet and the semiconductor film 7 is formed by casting will be described with reference to Fig. 2 showing a plan view of a thin film transistor. The same material and printing method as those used for the upper electrodes 5 and 6 in Example 1 can be used for the lower electrode 2. Other than the lower electrode 2, the same materials and methods as those used in Example 1 can be used. When an ink jet method is used, the lower electrode 2 which forms the gate electrode exhibits a shape in which dots are overlapped each other as shown in the figure. This is due to the fact that the conductive ink ejected from the head of ink jet isotropically wets and is spread over the uniform substrate 1 leaving the trace of a dot shape during the ejection. Even when the shape of the lower electrode 2 is thus deformed depending on the forming method, the photosensitive liquid-repellent film pattern having a generally same pattern as the shape of the lower electrode 2 is formed on the insulating film 3.

Therefore, the upper electrodes 5 and 6 can be formed on the insulating film 3 as a shape in which the shape of the lower electrode 2 is generally reversed. When for example P3HT is coated on the upper electrodes 5 and 6 by casting, the semiconductor 7 may be formed in a misaligned position (an example shifted in an upper-right direction is shown in the figure). Even when such misregistration is produced, the thin film transistor of the present invention provided uniform switching characteristics. This is due to the following reason. Generally, the thin film characteristics vary and become nonuniform depending on the variations of the parasitic capacitance formed by the member sandwiched by the lower electrode 2, gate electrode, and the upper electrodes 5 and 6, source/drain electrodes. In a general thin film transistor structure, a so-called top-contact structure is used, in which the upper electrodes 5 and 6 are formed on the semiconductor film 7. In this case, when the upper electrodes and the semiconductor film are positioned in misregistration, the parasitic capacitance varies and the characteristics become nonuniform. On the other hand, in the present invention, the upper and lower electrodes are formed in a self-alignment manner to prevent misregistration. Further, the present invention provides a so-called bottom-contact structure in which the upper and lower electrodes are formed first and then the semiconductor film 7 is formed thereon, so the semiconductor film 7 is not sandwiched by the upper

and lower electrodes and does not contribute to the parasitic capacitance. Consequently, the thin film transistor of the present invention provides uniform thin film transistor characteristics even when the upper
5 and lower electrodes 2 and 4 and semiconductor film 7 are formed by a printing method. If the insulating film is also formed by a printing method, all can be formed by a printing method, thereby providing a thin film transistor having uniform characteristics.

10 [0054]

[Example 3]

In the present example, a 2 row x 2 column active matrix thin film transistor substrate comprising four thin film transistors formed at the intersections
15 of two gate electrode wirings which form at least a part of the lower electrodes and two signal wirings which form at least a part of the upper electrodes, and a method for producing the same are described with reference to Fig. 3 showing a plan view and a sectional
20 view. Materials and forming methods for respective layers of the present example are the same as those in Examples 1 and 2, so they will not be described except specifically required.

[0055]

25 In the present example, in order to utilize the above described "non-penetrating effect of conductive ink" and "crosslinking effect of conductive ink" to form signal wirings/drain and source

electrodes/pixel electrodes, the shape having the features shown in Fig. 3 (a) is used as the pattern shape of the lower electrode 2 for mainly composing gate wirings/electrodes. Specifically, two gate wirings/electrodes, each of which is characterized by a shape in which adjacently placed two ring-shaped rectangles 8 each having an opening are connected at one connection part 9, are adjacently placed to each other through a space 10. A rectangular gate terminal 11 is connected at the left edge of the gate wirings/electrodes 5. Lower electrodes 12 for forming terminals to be utilized for forming terminals of signal wirings/drain electrodes 5 are adjacently placed at the upper and lower portions of the two gate wirings/electrodes through the spaces 10. Particularly, when a shape of the lower electrode 2, in which the width of the connection part 9 of the gate wiring/electrode (a in Fig. 3 (a)) and the width of the space 10 between the gate wirings/electrodes and between the gate wiring/electrode and the lower electrode 12 for forming a terminal (b in Fig. 3 (a)) are smaller than the width of the space between the adjacent rectangles 8 each having a ring-shaped opening (c in Fig. 3 (a)), is used to coat and calcine a conductive ink along the space between the rectangles, an upper electrode 5, which acts as a signal wiring and a drain electrode, was formed. The upper electrode 5 had a continuous linear shape in which the connection part 9 was bridged along

the space between the above described rectangles 8.
Further, when a conductive ink was coated and calcined
in the opening, the liquid-attracting region, of the
ring-shaped rectangle 8, the upper electrode 6, which
5 acts as the source electrode and pixel electrode, was
formed in the opening in a self-alignment manner (Fig. 3
(b)). The semiconductor films were formed on above
described electrode substrate, such that the
semiconductor films extend over and cover at least a
10 part of each of the signal wirings/source electrodes 5,
drain electrodes/pixel electrodes 6 and the insulating
film surface having the gate wirings/electrodes 2 in the
lower part thereof on the electrode substrate. Thereby,
the active matrix thin film transistor substrate is
15 completed in which four thin film transistors are placed
on respective intersections of the gate
wirings/electrodes 2 and signal wirings/drain electrodes
5. The point of the present example is to set the width
of the space between the rectangles 8, that is, the
20 width of the upper electrode c wider than the width a of
the space 10 and the width b of the connection part 9 so
that when coating and forming the upper electrode 5,
which is the signal wiring/drain electrode, using the
conductive ink, the conductive ink does not penetrate
25 into the space 10 between the gate wirings/electrodes 2
to cause the short circuit between the upper electrodes
5, and the conductive ink does not stop spreading over
the connection part 9 to break the upper electrode 5,

thereby forming the upper electrode 5 continuously in the longitudinal direction, utilizing the "non-penetrating effect of conductive ink" and "crosslinking effect of conductive ink". Specifically, the above
5 effect was produced by setting $a = b = 3 \mu\text{m}$ relative to $c = 15 \mu\text{m}$.

[0056]

The plan view illustrating the relation between the shape of the lower electrode and the shape
10 of the signal wiring/drain electrode is shown in Fig. 4. Fig. 4 (a) shows the case in which the width b of the space 10 is nearly equal to or more than the width c of the upper electrode 5. In this case, the conductive ink penetrated into the space 10 to cause the short circuit
15 between the adjacent upper electrodes 5. Fig. 4 (b) shows the case in which the width a of the connection part 9 is nearly equal to or more than the width c of the upper electrode 5. In this case, the conductive ink did not spread over the liquid-repellent region on the
20 connection part 9 to cause disconnection. If the width a of the connection part 9 can be set large as in Fig. 4 (b), the resistance of the gate wiring/electrode can be reduced, which would be advantageous to the thin film transistor substrate for use in the display device. As
25 a measure to the disconnection, Fig. 4 (c-1) shows an example in which the conductive ink is re-coated on the connection part for connection. At this time, it will be desirable to remove the photosensitive liquid-

repellent film with a HeCd laser or the like before the re-coating and to use a conductive ink having a relatively higher viscosity. However, the problem of the correction by this method is that it requires time.

5 [0057]

Fig. 4 (c-2) shows an example in which the shape of the lower electrode is devised so as to prevent disconnection failure. In this example, a plurality of connection parts 9 is provided (3 parts in the figure),
10 wherein even when the total width of the connection parts 9 is equal to or more than the width c of the upper electrode, each width of the connection parts is less than the width c of the upper electrode. Thereby, the each connection part can be passed over by the
15 "crosslinking effect of conductive ink" to prevent the disconnection of the upper electrode 5 and at the same time the gate wiring/electrode can reduce the resistance. Specifically, disconnection occurred when providing one connection part having $b = 15 \mu\text{m}$ relative
20 to $c = 15 \mu\text{m}$, but when the connection part is divided into three each having the width of $5 \mu\text{m}$, the disconnection was eliminated by crosslinking.

[0058]

Further, Fig. 4 (c-3) shows an example in
25 which the ring-shaped rectangle is curved inside at the connection part 9 to locally increase the width c of the upper electrode. In this example, the width c can be designed wider than the width a of the connection part

9, so that the "crosslinking effect of conductive ink" is enhanced and the signal wiring part of the upper electrode can be formed without disconnection.

[0059]

5 In the examples shown in Figs. 3 and 4, in the gate wirings/electrodes 2, adjacently placed ring-shaped rectangles 8 each having an opening are placed such that the upper and lower edges thereof are aligned horizontally. However, the present invention needs not
10 be limited to this. For example, as shown in Fig. 5, a configuration, in which the rectangles 8 are placed in the positions alternately shifted up and down, may be adopted. In this case, the space 10 between the gate wirings/electrodes are not crossed linearly with the
15 space between the rectangles 8 in which the signal wirings are to be formed. It was confirmed that this configuration has the effect to prevent the failure that when a conductive ink is dropped on the space between the rectangles 8, the ink does not flow into the space
20 10 in both right and left directions to cause disconnection or short circuit. Thus, it is possible to suppress the failure of disconnection and short circuit of the signal wirings formed in a coating process, not only by utilizing the non-penetrating effect of
25 conductive ink by reducing the width of the space 10 as described above but also by devising the shape of the gate wirings/electrodes.

[0060]

As described hereinabove, it was possible to form an active matrix thin film transistor substrate by forming an electrode substrate in which a gate wiring/electrode faces a signal wiring/drain electrode and a source electrode/pixel electrode through an insulating film in a self-aligned manner and placing a thin film transistor at the intersection of the gate wiring/signal wiring. All of the active matrix thin film transistor substrate can be produced by a printing method using the methods shown in Examples 1 and 2.

[0061]

Finally, the conductive ink material for forming the upper electrodes 5 and 6 is referred to. When this substrate is used for the light-transmitting display device, the pixel electrode/source electrode 6 needs to be transparent, so coating-type ITO materials and conductive polymers described in Example 1 are used. When it is used for a reflective display device, it is effective to use Ag or the like having a high degree of reflection in the visible light wavelength region for improving the display performance.

[0062]

[Example 4]

In the present invention, a m row \times n column active matrix thin film transistor substrate comprising $m \times n$ pieces of thin film transistors formed at the intersections of m pieces of gate electrode wirings which form at least a part of the lower electrodes and n

pieces of signal wirings which form at least a part of the upper electrodes, and a method for producing the same are described with reference to Fig. 6 showing a plan view and Fig. 10 showing a sectional view. Basic configuration is the same as that in Example 3. First, m pieces of gate wirings/electrodes 2, in which adjacently placed n pieces of ring-shaped rectangles each having an opening are connected to each other at least at one connection part 9 or more (two in the present example), are adjacently placed to each other through spaces 10 (Fig. 6). Particularly, when the width b of the space 10 and the width a of each of the connection parts 9 are designed to be equal to or more than the space c between the rectangles each having a ring-shaped opening, it is possible to form n pieces of upper electrodes 5 which act as the signal wirings/drain electrodes in a continuous linear shape self-aligned to the lower electrode by spreading over the liquid-repellent regions on the connection parts 9, by coating a conductive ink on the space c and calcining it. The penetration of the conductive ink into the spaces 10 to short the upper electrodes 5 to each other will not occur.

[0063]

Further, in the present example, an integrally formed lower electrode 12 for forming terminals is placed surrounding the outer periphery of m pieces of the gate wirings/electrodes 2 as a part of the lower

electrode 2. In order to prevent the formation of the upper electrodes 5 at the edge of the substrate 1 outside of the lower electrode 12 for forming terminals, a sealing mask may be applied on this part and removed after forming the upper electrodes 5. Furthermore, in the present invention, the width of the signal terminal part 13 for the lower electrode 12 for forming terminals was designed to be wider than the width c of the upper electrode. This is not only just for reducing the contact resistance with the signal circuit to be described hereinafter by increasing the area of the upper electrode terminal, but also for utilizing it as ink reservoirs for coating and forming the relatively long signal wirings 5 with a conductive ink. Namely, when the conductive ink dropped along the space having the width c for forming the wirings 5 is too much, the conductive ink flows into the signal terminal part 13, and when it is too few, the conductive ink is supplied from the signal terminal part 13. Thus, the ink reservoirs act such that the upper electrodes 5 can be formed with suitable amount of conductive ink (Fig. 7). By forming the semiconductor 7 on this electrode substrate using the similar placement, similar method and similar material as in Example 3, $m \times n$ pieces of thin film transistors are formed at the intersections of m pieces of gate wirings 2 and n pieces of signal wirings 5 (Fig. 8). Further thereon, a protective film 14 is formed. After forming the protective film 14, through

holes 15 are formed by removing the protective film from above the pixel/source electrode 6, gate terminal 11, and signal terminal 13. The protective film and the through holes are formed, for example, by forming
5 silicon nitride or silicon oxynitride using plasma chemical vapor deposition at a substrate temperature of 150°C or higher, and by subjecting it to dry-etching processing by photolithography using SF₆ as an etching gas. At this time, it will be no problem that the
10 position of the through holes is a little shifted, so printing of photoresist may be used for forming the same. Further, the protective film and through holes can be formed in one operation by mask exposure and development after coating and temporary calcining of an
15 organic film comprised of a photosensitive polyimide or the like. When the printing method described in Example 3 and the above method for forming protective film/through holes are used in combination, an active matrix thin film transistor substrate can be formed in
20 which the gate wiring/electrode 2 and the signal wirings/pixel electrodes 5 and 6 are placed in self-alignment through the insulating film 3 by using only a printing method without using photolithography.
Furthermore, it is needless to say that when the lower
25 electrode 2 is finely processed and formed using photolithography, the lower electrodes 5 and 6 can also be finely formed as a reversed pattern shape thereof, thereby forming an active matrix thin film transistor

substrate with high definition.

[0064]

[Example 5]

In the present example, the display device
5 using the active matrix thin film transistor substrate
of the present invention will be described with
reference to Fig. 14 showing a plan view and a sectional
view of the main device configuration. A gate scanning
circuit 17 is connected to a gate terminal 11 of an
10 active matrix thin film transistor substrate 16, and a
signal circuit 18 is connected to a signal terminal 13
thereof, by a TAB (Tape Automated Bonding) method or a
COG (Chip on Glass) method. The both circuits are
further connected to a control circuit 19. Display
15 elements 20 are sandwiched between each pixel electrode
of the active matrix thin film transistor substrate 16
and an opposing electrode 21. The thin film transistor,
which is connected to the gate wiring/electrode to which
the scanning voltage that is output from the gate
20 scanning circuit 17 is applied, is operated to apply the
signal voltage supplied from the signal circuit
synchronized with the scanning voltage to the pixel
electrode connected to the thin film transistor,
subjecting the display elements to so-called line
25 sequential drive to operate the display device. As the
display elements 20, capacitance driving elements such
as liquid crystal display elements or electrophoresis
elements can be applied to the configuration of the thin

film transistor substrate of the present invention. In the case of the In-Plane-Switching liquid crystal display device, the opposing electrode 21 is constructed within the thin film transistor as is well known, so the configuration is different from the present figure.

However, basically, the above can be applied in a same manner. Further, current driving display elements such as an organic electroluminescent device (OLED) can be applied, if a well known active matrix thin film transistor substrate for driving OLED is constructed according to the present invention. This display device can be applied to the flat display for cellular phones, flat TVs, note PCs and the like. Furthermore, it is needless to say that the thin film transistor of the present invention can be applied to all semiconductor devices utilizing thin film transistors such as RFID devices typified by non-contact IC cards, other than display devices.

[0065]

[Example 6]

In the present example, a back-surface exposure method and device configuration of a photosensitive liquid-repellent film are described with reference to Fig. 15 showing the schematic configuration thereof. A substrate 1, on which a lower electrode 2 and an insulating film 3 are layered in this order and then a photosensitive liquid-repellent film 4 is dip-coated, is provided. In this case, the photosensitive

liquid-repellent film 4 is attached to the back-surface of the substrate 1 and to the surface of the insulating film 3. A photocatalyst film 24 typified by titanium oxide having a thickness of about 200 nm, which is

5 formed on the surface of a supporting plate 23 comprised of aluminum or the like in which heating mechanism such as a sheathed heater is built, is adhered to the above substrate 1 (Fig. 15 (a)). In order to improve the adhesion, it is effective to place a rubber sheet

10 comprised of PDMS or the like between the supporting plate 23 and the photocatalyst film 24 as a cushioning material. When irradiating the back-surface of the substrate 1 with the light having the wavelengths that transmit the substrate and the insulating film and is

15 absorbed by the photocatalyst film, hole carriers having a strong oxidizing power are produced on the surface of the photocatalyst film 24. These hole carriers directly decompose the adjacent photosensitive liquid-repellent film and the photosensitive liquid-repellent film 4 is

20 processed to a generally same pattern shape as the lower electrode 2. At this time, when the photocatalyst film 24 was preliminarily heated by the heating mechanism to 100°C or above, the pattern processing accuracy of the photosensitive liquid-repellent film 4 was improved, and

25 it was possible to process it to a minimum pattern width of 3 μm . It is contemplated that when moisture attaches to the surface of the photosensitive liquid-repellent film, the hole carriers will oxidatively decompose water

to produce an OH group, which will indirectly decompose the photosensitive liquid-repellent film; and the OH group will float and move in the space between the photocatalyst film 24 and the photosensitive liquid-repellent film 4 to decompose and remove even the photosensitive liquid-repellent film 4 in a shielded region. When adsorbed moisture is preliminarily removed from the surface of the photosensitive film by heating, the indirect decomposition process by the OH group does not work, but only the direct decomposition process by the hole carriers having a short moving distance does work, improving the pattern processing accuracy of the photosensitive liquid-repellent film 4. In addition, the photocatalyst film 24 not with a irregular surface but with a smoother surface improves the adhesion between the photocatalyst film 24 and the photosensitive liquid-repellent film 4, improving the pattern processing accuracy and efficiency.

[0066]

As described in Example 1, when titanium oxide is used as a photocatalytic material, the exposure wavelengths are 400 nm or less, and so materials to transmit these wavelengths are used for the substrate 1 and the insulating film 3. When a visible-light-responsive photocatalytic material such as nitrogen-doped titanium oxide is used, the exposure wavelengths are 600 nm or less, and so materials to transmit these wavelengths are used for the substrate 1 and the

insulating film 3. In the present method, the photocatalytic material is not used in the insulating film, so organic materials having the above conditions can be used for the insulating film 3 and the
5 semiconductor film 7. Further, when the photosensitive film is processed by the present method, the light having the wavelengths that do not directly process the photosensitive liquid-repellent film can be used. Therefore, as for the materials for the electrode
10 substrate, when for example a fluorinated alkyl silane coupling agent having a photosensitive wavelength of 300 nm or less is used as the photosensitive liquid-repellent film 4, materials that are opaque to the photosensitive wavelengths of the photosensitive liquid-repellent film can be used for at least one of the
15 substrate and the insulating film, such as a glass substrate such as Corning 1737 for the substrate 1 or an organic material such as PVP for the insulating film 3.

[Brief Description of the Drawings]

20 [Fig. 1]

Fig. 1 is a plan view and a sectional view illustrating one example of an electrode substrate and a thin film transistor of the present invention, and their production.

25 [Fig. 2]

Fig. 2 is a plan view of a thin film transistor of the present invention prepared by a

printing method.

[Fig. 3]

Fig. 3 shows plan views and sectional views illustrating a 2x2 active matrix thin film transistor substrate of the present invention, and their production.

[Fig. 4]

Fig. 4 is a plan view illustrating the relation of the shapes between a lower electrode and a signal wiring/drain electrode of the present invention.

[Fig. 5]

Fig. 5 shows a plan view illustrating the shape of a lower electrode (gate wiring/electrode) of the present invention.

[Fig. 6]

Fig. 6 is a plan view illustrating an mxn active matrix thin film transistor of the present invention and its production.

[Fig. 7]

Fig. 7 is a plan view illustrating an mxn active matrix thin film transistor of the present invention and its production.

[Fig. 8]

Fig. 8 is a plan view illustrating an mxn active matrix thin film transistor of the present invention and its production.

[Fig. 9]

Fig. 9 is a plan view illustrating an mxn

active matrix thin film transistor of the present invention and its production.

[Fig. 10]

Fig. 10 is a sectional view illustrating an
5 m×n active matrix thin film transistor of the present invention and its production.

[Fig. 11]

Fig. 11 is a view illustrating the principle
of forming coated electrode patterns by a photosensitive
10 liquid-repellent monolayer utilized in the present invention.

[Fig. 12]

Fig. 12 is a plan view and a sectional view
illustrating the problem of misregistration of
15 electrodes in an electrode substrate.

[Fig. 13]

Fig. 13 is a view illustrating a back-surface
exposure patterning method of a photosensitive liquid-
repellent film of the present invention.

20 [Fig. 14]

Fig. 14 is a plan view and a sectional view
illustrating main device configuration of a display
device of the present invention.

[Fig. 15]

25 Fig. 15 is a view illustrating a back-surface
exposure method of a photosensitive liquid-repellent
film and device configuration of the present invention.

[Fig. 16]

Fig. 16 is a view illustrating the effect of reducing the number of processes for producing an electrode substrate of the present invention.


[Description of Reference Numerals]

- 5 1 ... substrate, 2 ... lower electrode, gate wiring/electrode, 3 ... insulating film, 4 ... photosensitive liquid-repellent film, 5 ... upper electrode, signal wiring/drain electrode, 6 ... upper electrode, pixel electrode/source electrode, 7 ... semiconductor film, 8 ... ring-shaped rectangle having opening of gate wiring electrode, 9 ... connection part of gate wiring, 10 ... space between adjacent gate wirings/electrodes, 11 ... gate terminal, 12 ... lower electrode for forming signal terminal, 13 ... signal terminal, 14 ... protective film, 15 ... through hole, 16 ... active matrix thin film transistor substrate, 17 ... gate scanning circuit, 18 ... signal circuit, 19 ... control circuit, 20 ... display element, 21 ... opposing electrode, 22 ... heating mechanism, 23 ... supporting plate, 24 ... photocatalyst, 25 ... hole.

【書類名】 図面
【図 1】

[Kind of Document] Drawings 図 1


[Fig. 1]

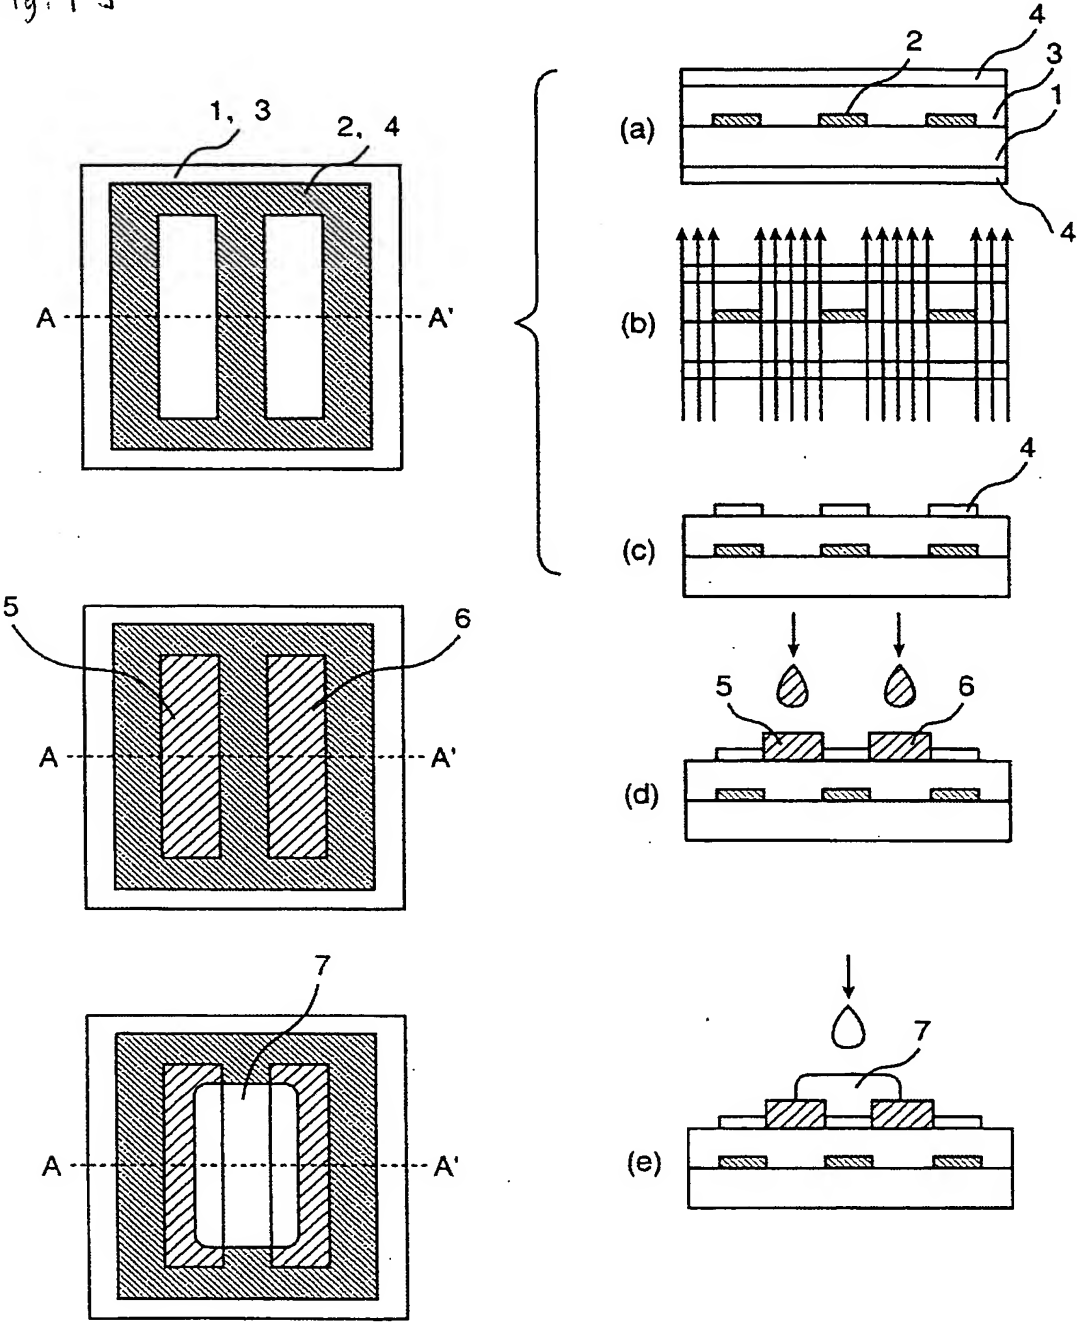

【図2】

[Fig. 2]


図 2

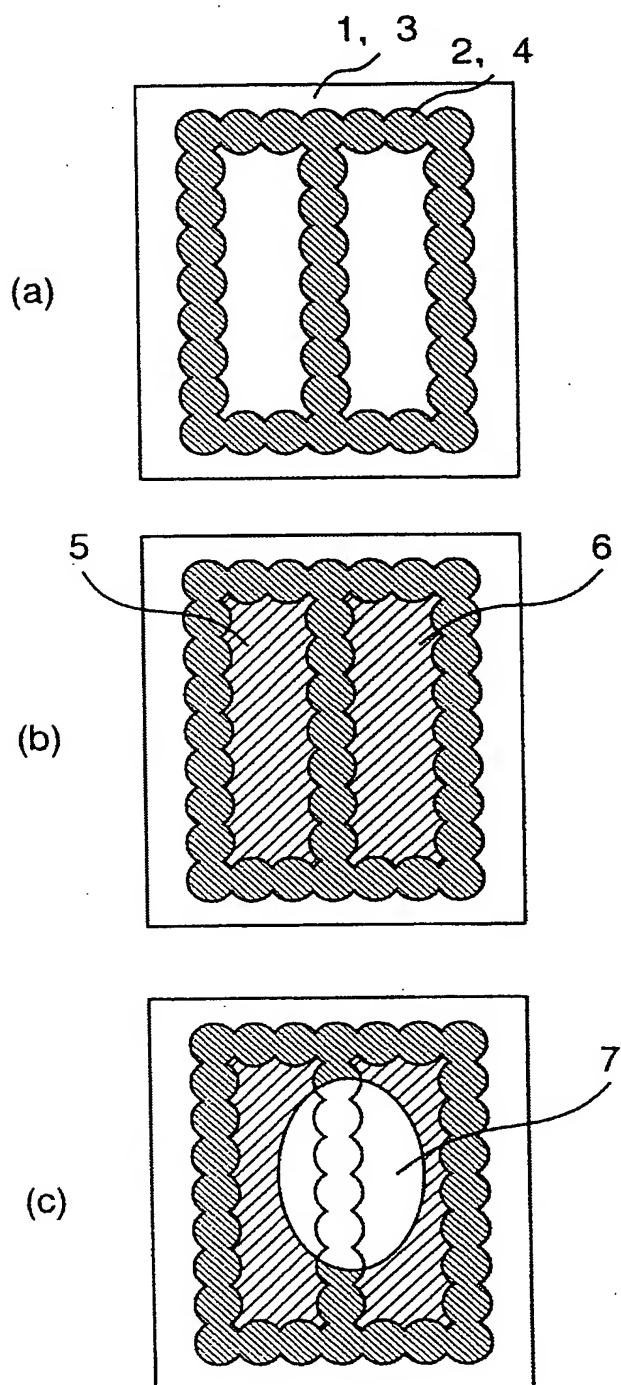

【図 3】

[Fig. 3]


図 3

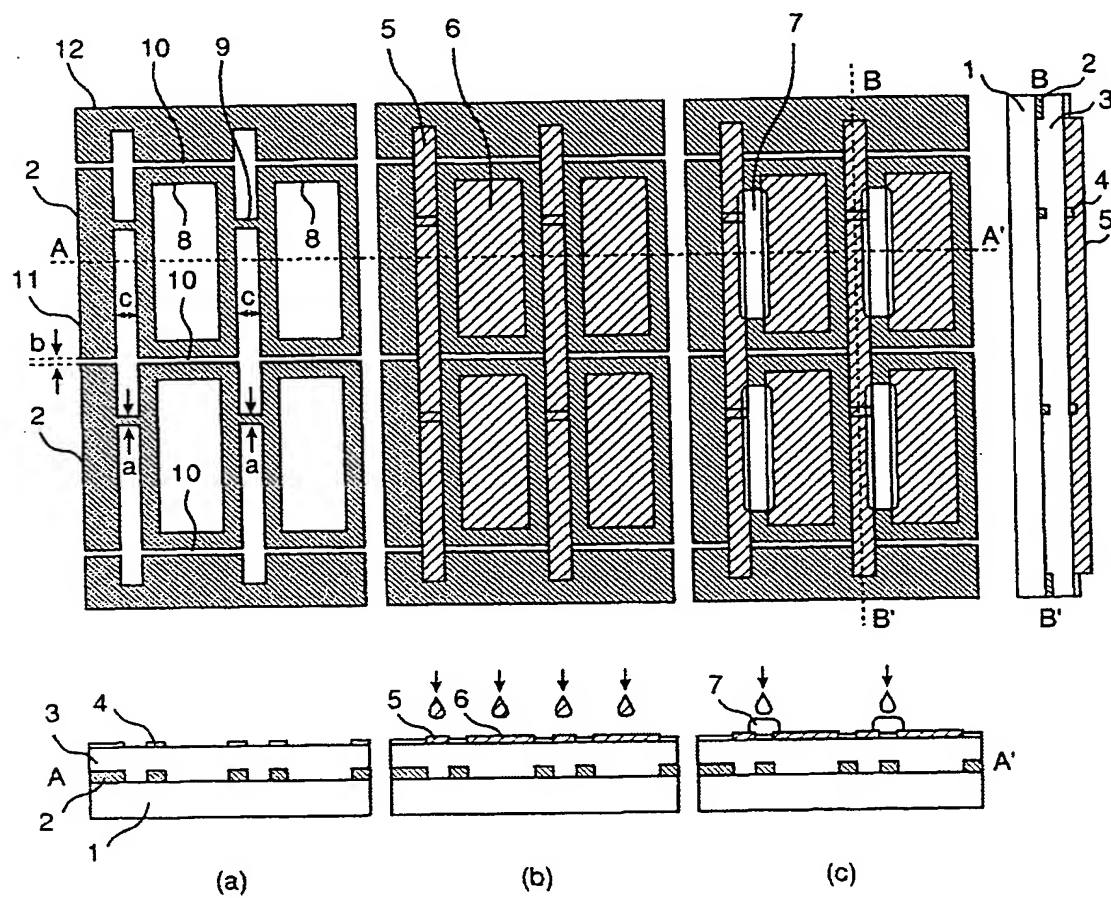

【図4】

[Fig. 4]


図 4

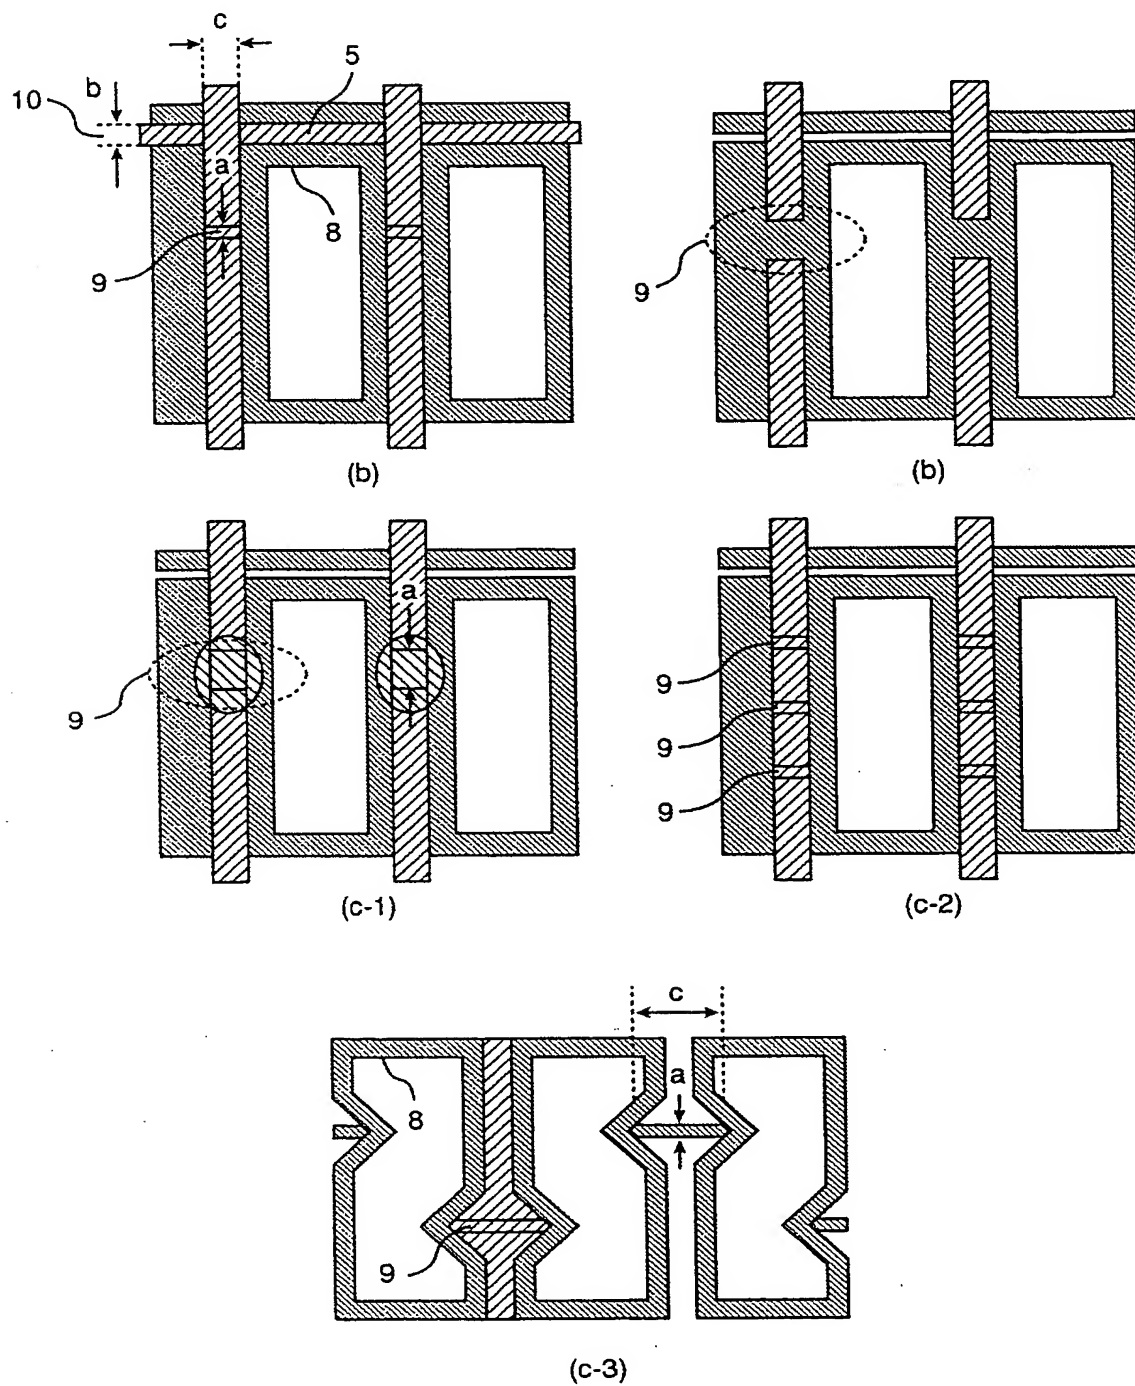

【図5】

[Fig. 5]


図 5

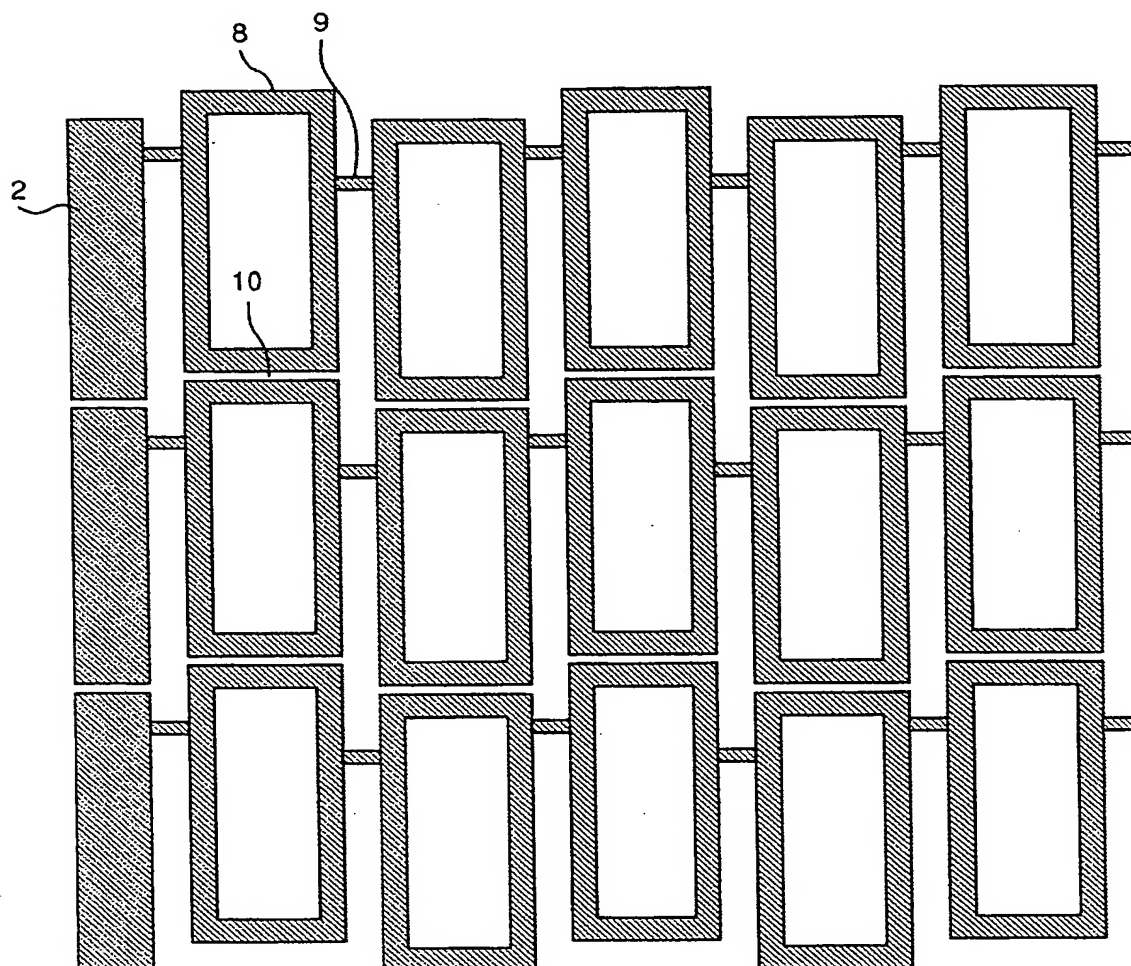

【図 6】

[Fig. 6]


图 6

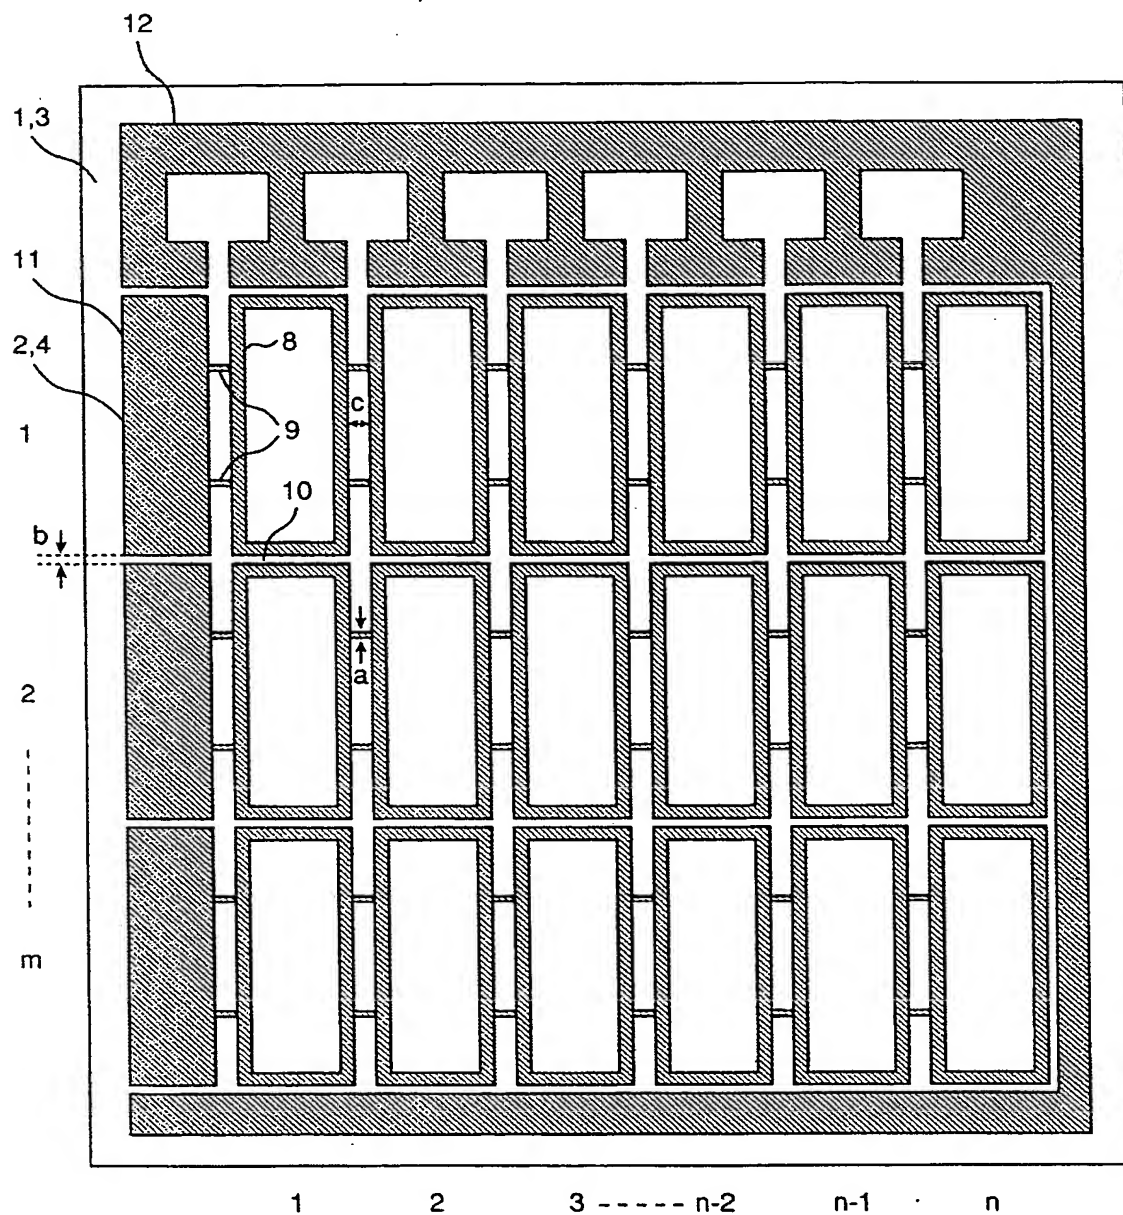

【図 7】

[Fig. 7]


図 7

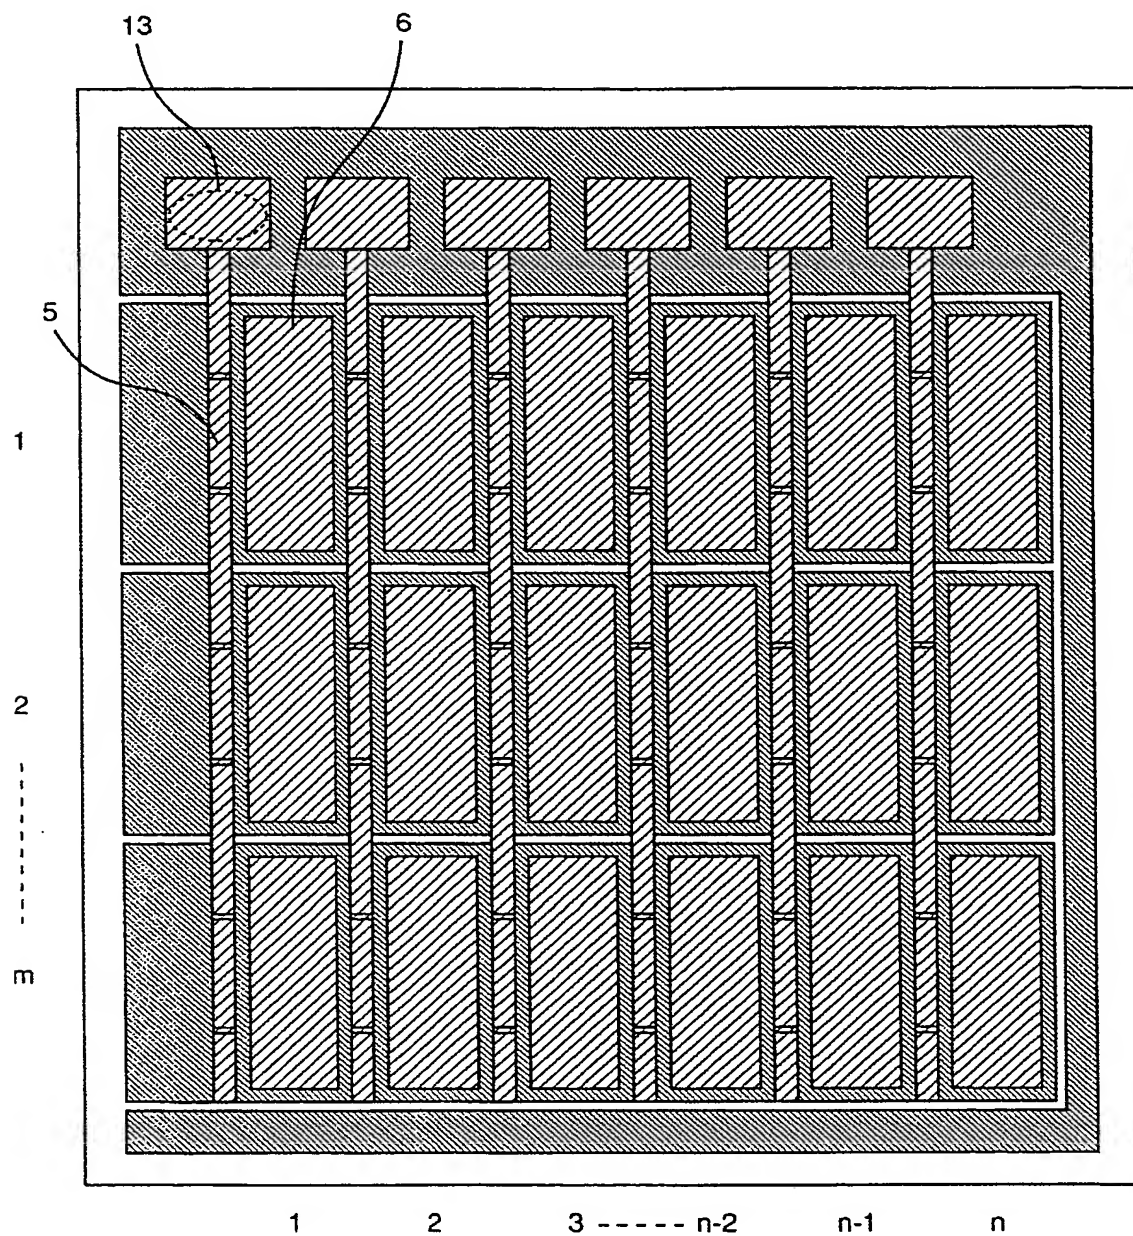

【図 8】

[Fig. 8]


図 8

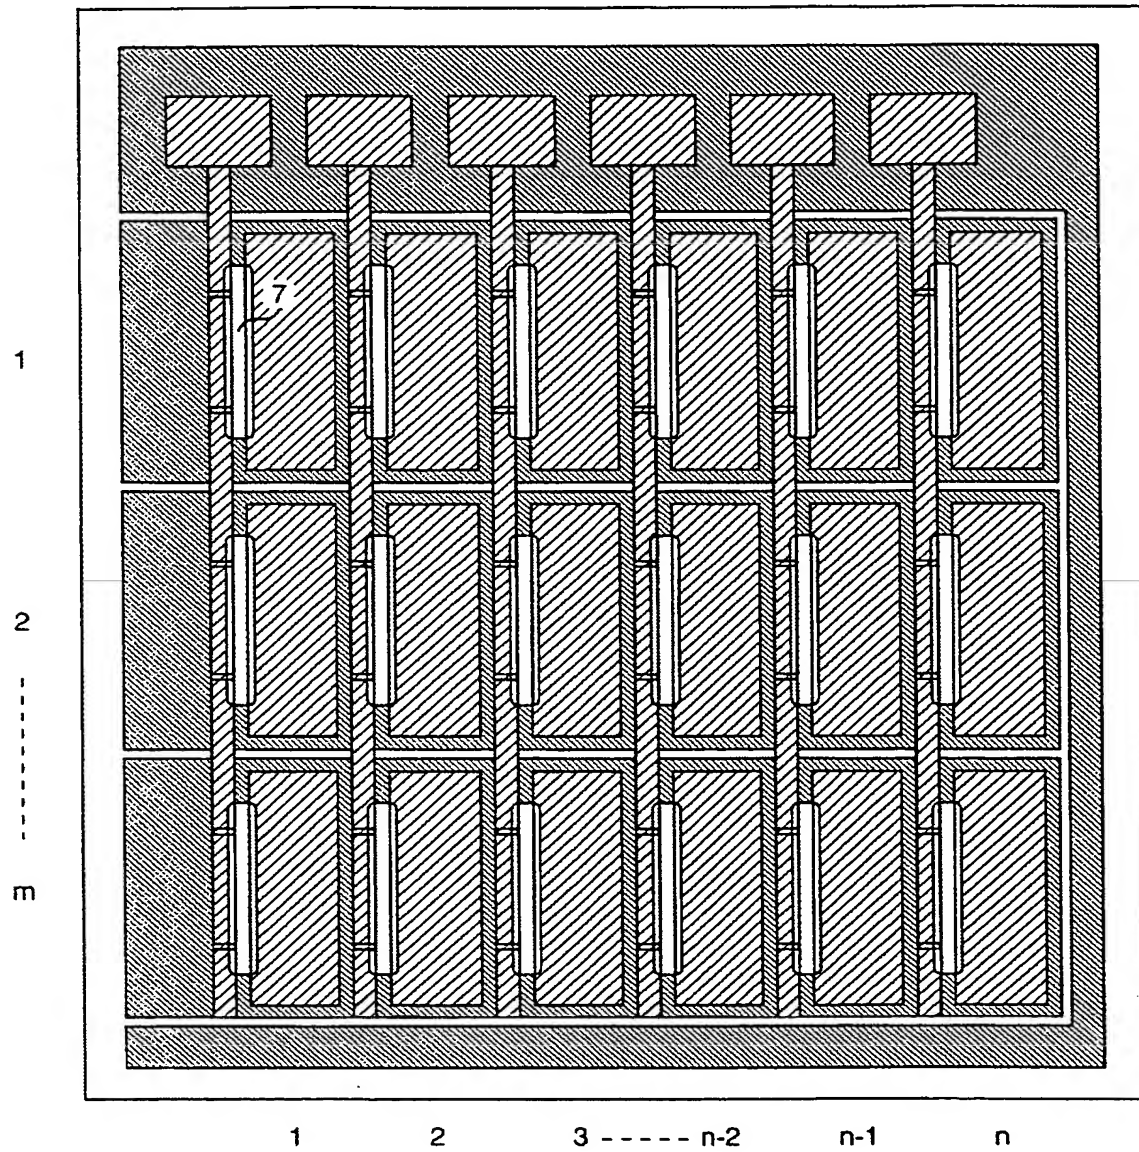

【図 9】

[Fig. 9]


図 9

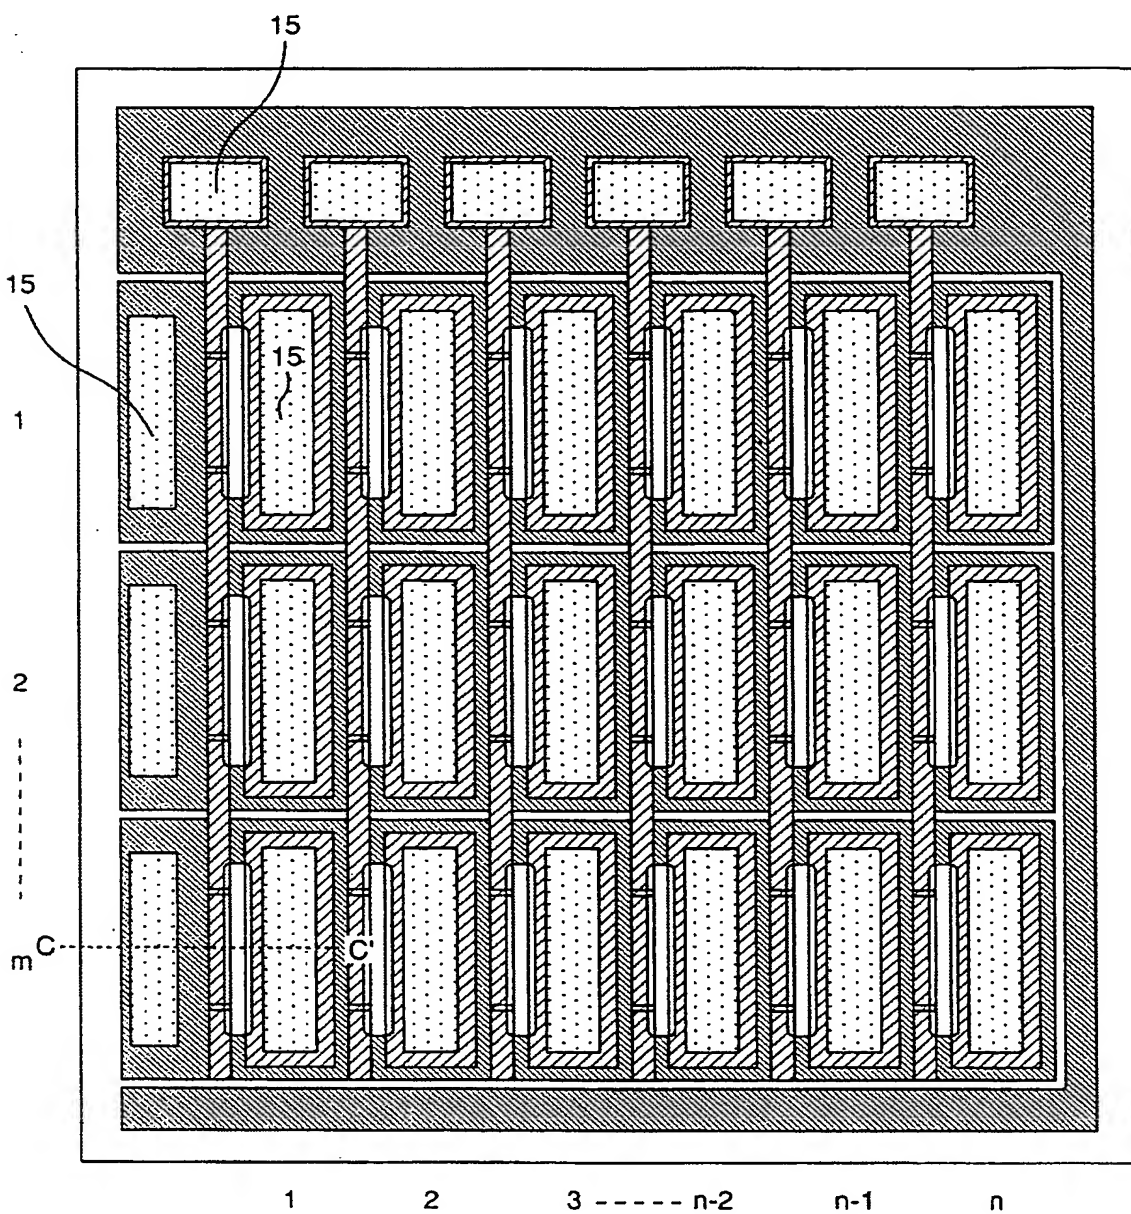

【図 10】

[Fig. 10]


図 10

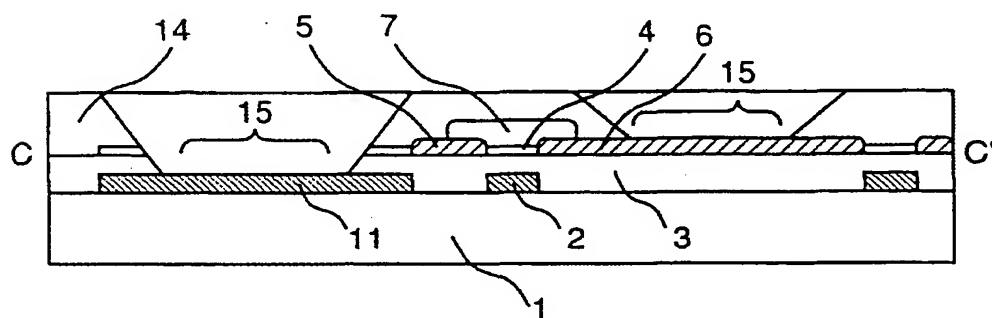

【図 1 1】

[Fig. 11]





図 11

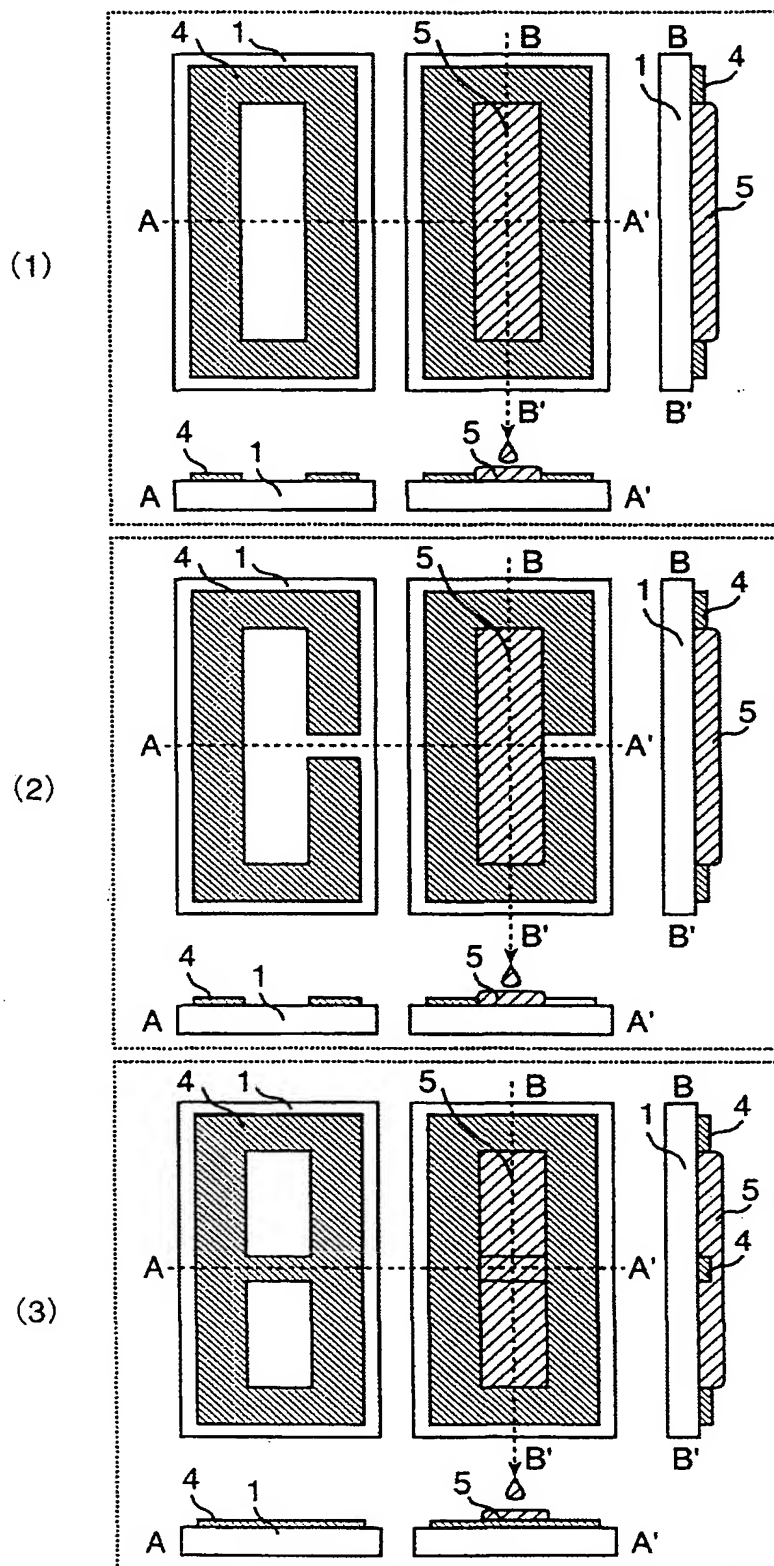

【図12】

[Fig. 12]


図 12

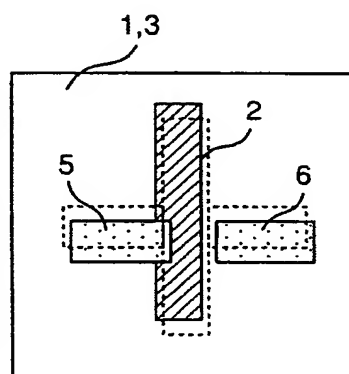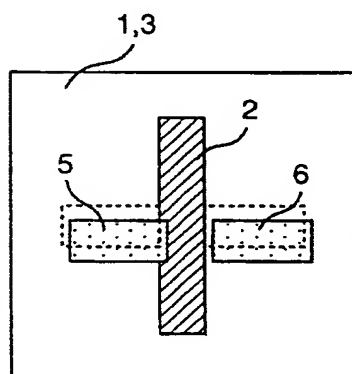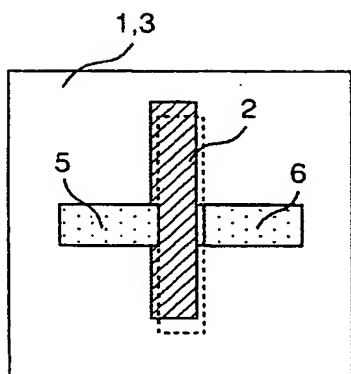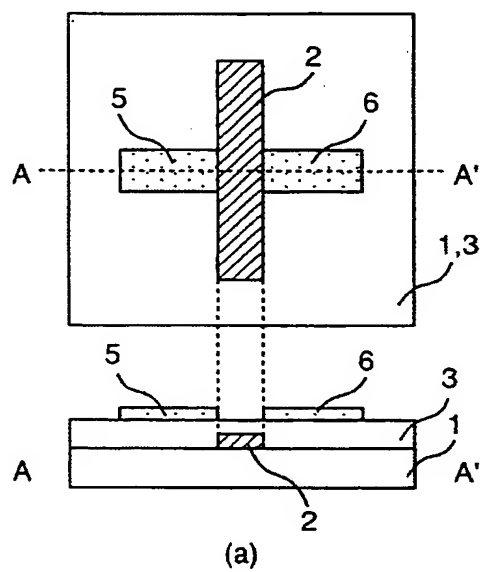

【図 13】

[Fig. 13]


図 13

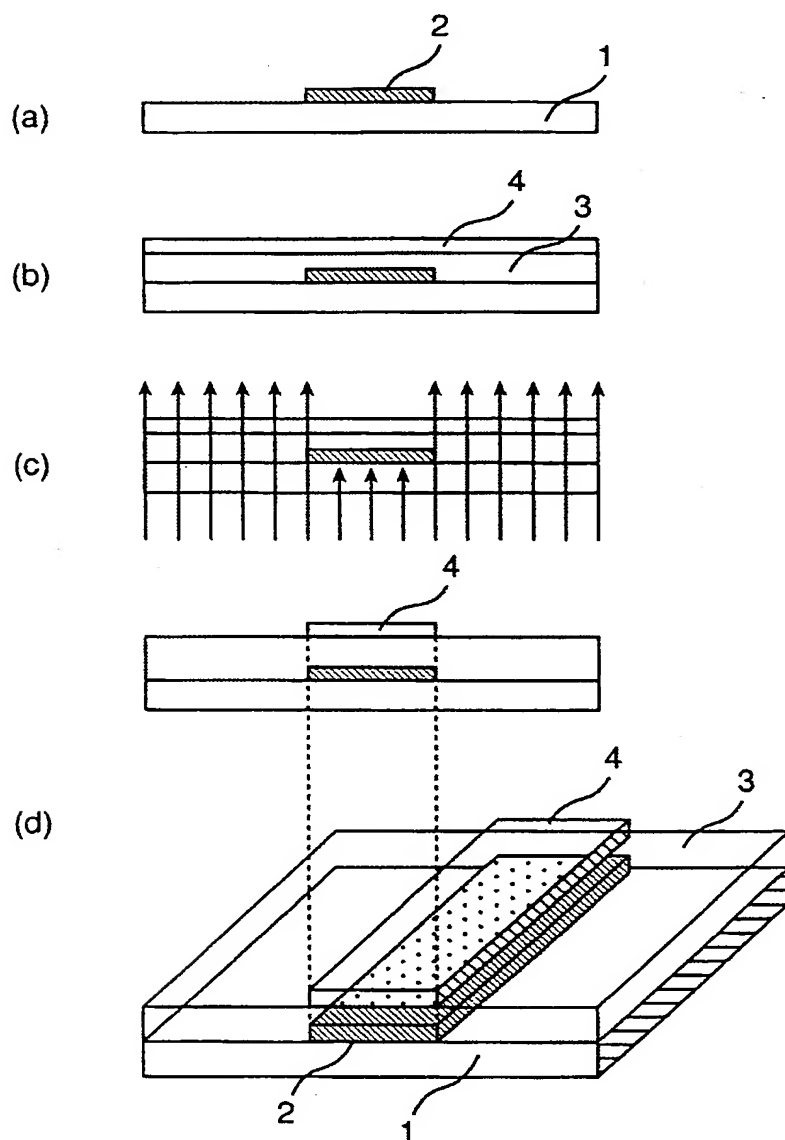


【図14】

[Fig. 14]

図 14

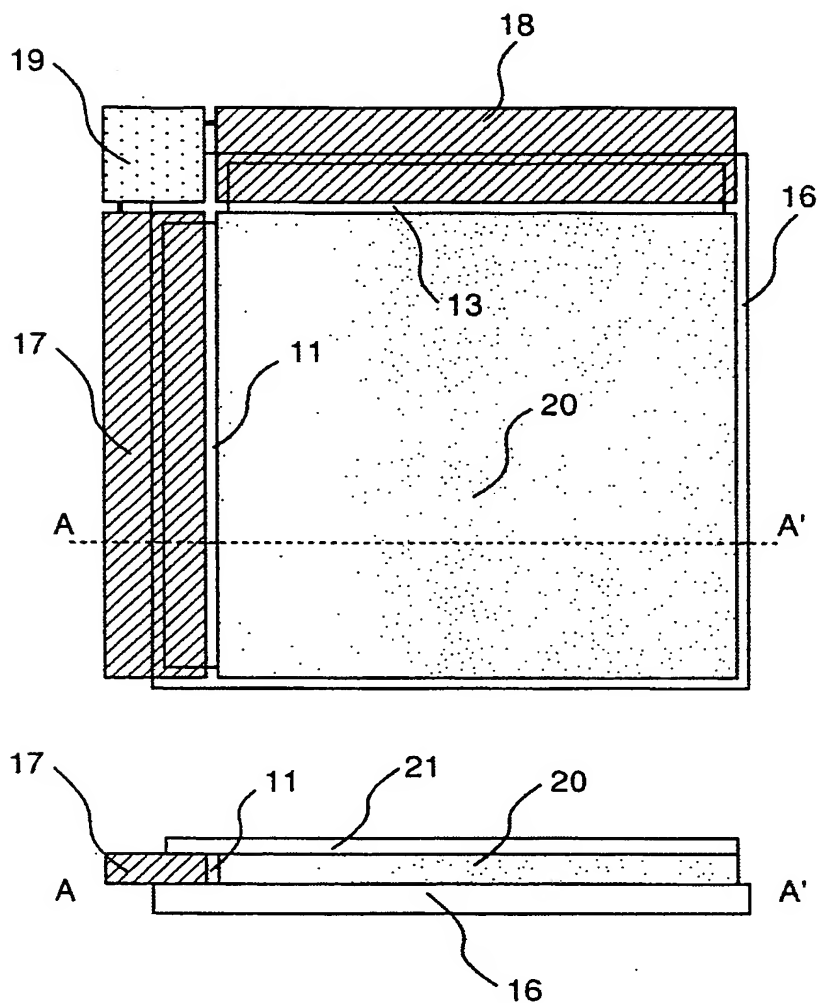


[FIG. 15]

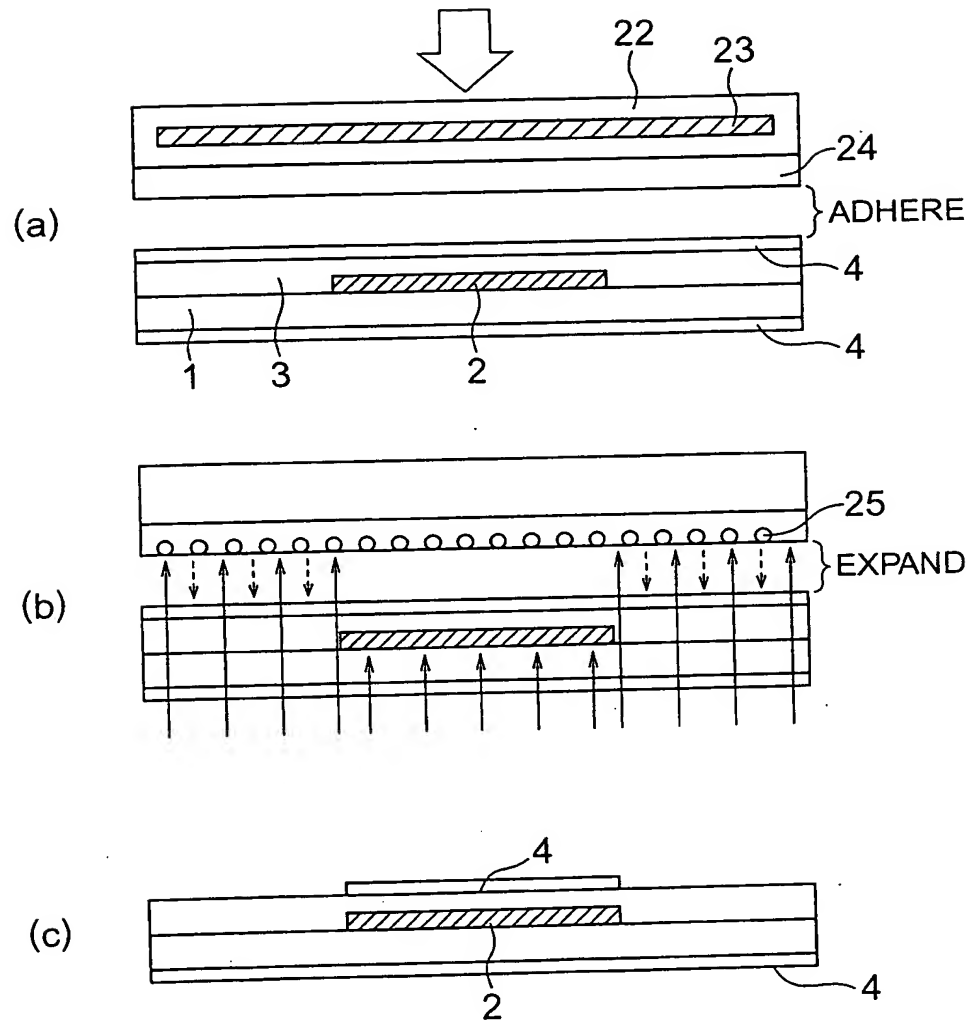


[Fig. 16]

(A)

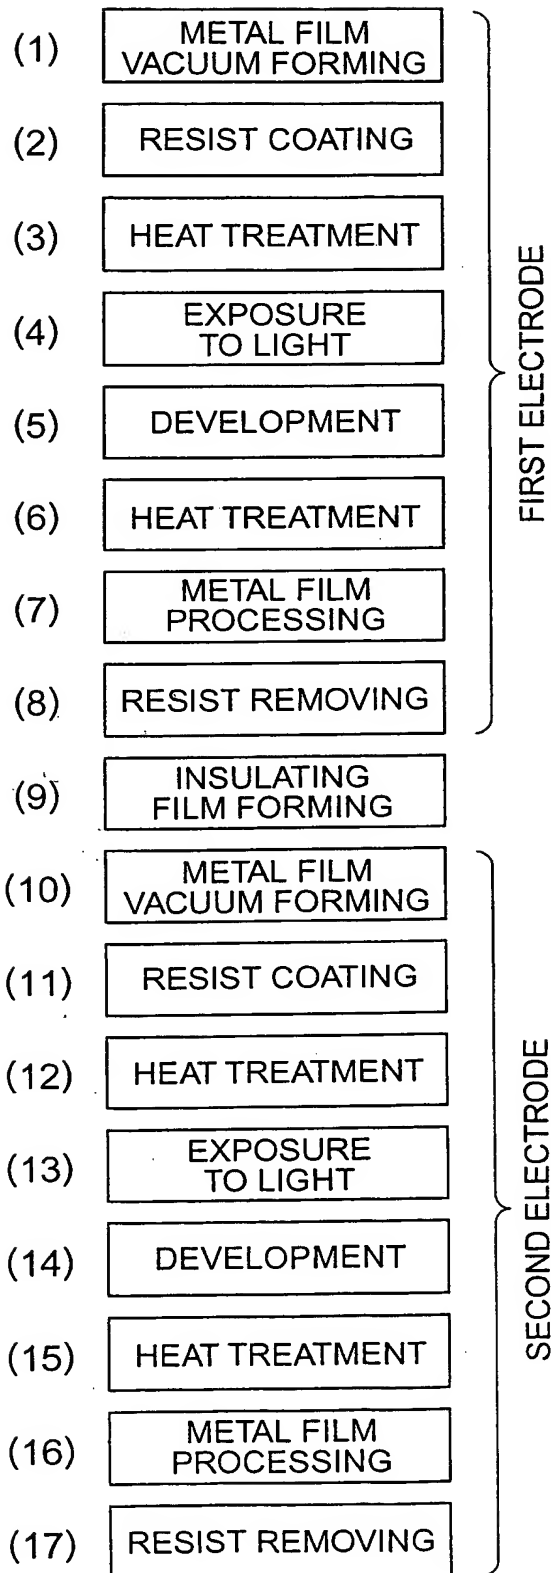

(B)

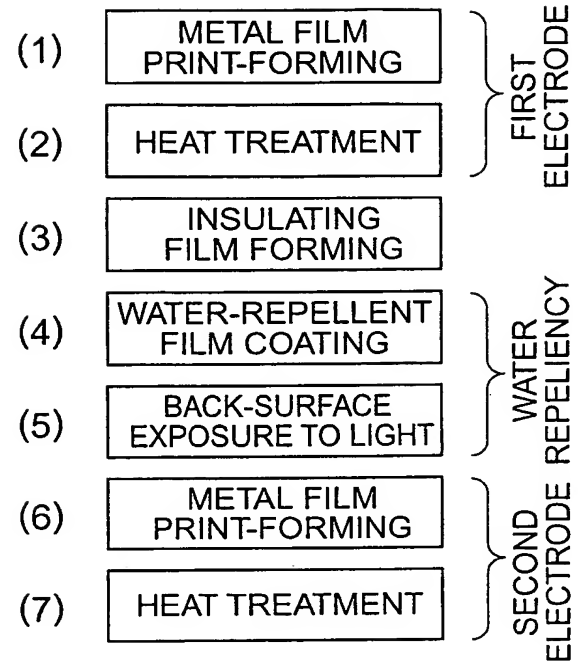

[Title of Document] Abstract

[PROBLEM]

In a printing method, an electrode substrate in which a lower electrode and an upper electrode are accurately aligned through an insulating film cannot be formed due to the occurrence of misregistration.

[SOLUTION]

In the present invention, a lower electrode is utilized as a photomask to form a liquid-repellent region having a generally same pattern shape as that of the lower electrode and a liquid-attracting region having a generally reversed pattern shape on an insulating film. A conductive ink is coated and calcined in the liquid-attracting region to form an upper electrode having a generally reversed pattern shape to the lower electrode in a self-aligned manner, eliminating the occurrence of misregistration even when a printing method is used.

Consequently, semiconductor devices such as an active matrix thin film transistor substrate can be formed using a printing method.

[SELECTED DRAWING] Fig. 1